

SERIES RXB

MIXED OVENS

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Киргизия (996)312-96-26-47 Казахстан (772)734-952-31 Таджикистан (992)427-82-92-69

<http://fmind.nt-rt.ru> || fdm@nt-rt.ru

RXB 606

REF. 710084



6 x 600 x 400

6 x GN 1/1

EQUIPMENT

- Cycle end alarm
- Door safety switch
- Safety thermostat
- LED chamber light
- Water connection ¾
- Manual chimney control
- Folding inner glass for cleaning
- Reversing gear
- Timer 0-120 min. Continuous mode
- Adjustable humidity 0-100%

FEATURES

Power		9.100 W
Max temperature		250° C
Weight		90 Kg.
Voltage		400 V - 50/60 Hz
Connection		Three phase 3F + N + T
Cooking chamber dimension		(W)490 x (D)655 x (H)630 mm.
External dimension		(W)755 x (D)880 x (H)930 mm.
Distance between trays		80 mm.
RRP		
Change opening door		

RXB 606 E

REF. 710425



6 x 600 x 400

6 x GN 1/1

EQUIPMENT


- Cycle end alarm
- Door safety switch
- Safety thermostat
- LED chamber light
- Water connection ¾
- Double fan speed
- Adjustable humidity 0-100%
- Folding inner glass for cleaning
- Reversing gear
- Timer 0-120 min. Continuous mode
- Manual chimney control

FEATURES

Power		9.100 W
Max temperature		250° C
Weight		90 Kg.
Voltage		400 V - 50/60 Hz
Connection		Three phase 3F + N + T
Cooking chamber dimension		(W)490 x (D)655 x (H)630 mm.
External dimension		(W)755 x (D)880 x (H)930 mm.
Distance between trays		80 mm.
RRP		
Change opening door		

RXB 606 V7

REF. 710186

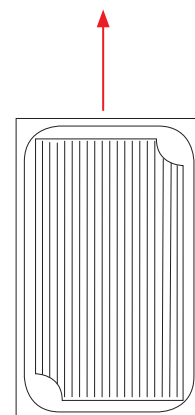

6 x 600 x 400

6 x GN 1/1

EQUIPMENT


- Climate Control-adjustable humidity
- Fan Control-Fan Control-adjustable speed
- Steam Control-adjustable chimney
- Delta T
- Optional: Core Prober
- Cooking phases
- Regeneration / Maintenance
- Recipe book
- Favorites
- Cool Down / Preheat
- Cycle end alarm
- Door safety switch
- Safety thermostat
- LED chamber light
- Water connection $\frac{3}{4}$
- Folding inner glass for cleaning
- Reversing gear

FEATURES

Power		9.100 W
Max temperature		270° C
Weight		92 Kg.
Voltage		400 V - 50/60 Hz
Connection		Three phase 3F + N + T
Cooking chamber dimension		(W)490 x (D)655 x (H)630 mm.
External dimension		(W)815 x (D)880 x (H)930 mm.
Distance between trays		80 mm.
RRP		
Change opening door		
Automatic washing system		
Core Prober		

RXB 606 GAS

REF. 710253

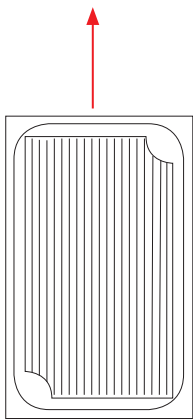

6 x 600 x 400

6 x GN 1/1

EQUIPMENT


- Cycle end alarm
- Door safety switch
- Safety thermostat
- Manual chimney control
- LED chamber light
- Water connection 3/4
- Folding inner glass for cleaning
- Reversing gear
- Timer 0-120 min. + continuous mode
- Adjustable humidity 0-100%

FEATURES

Power		400 W
Gas power		13,5 kW_11620 Kcal/h
Max temperature		250° C
Weight		104 Kg.
Voltage		220 V - 50/60 Hz
Connection		SINGLE PHASE
Cooking chamber dimension		(W)490 x (D)655 x (H)630 mm.
External dimension		(W)815 x (D)880 x (H)1090 mm.
Distance between trays		80 mm.
RRP		
Change opening door		
Natural gas		Under request
Chimney diameter		ø 150 mm.

RXB 606 V7 GAS

REF. 710314

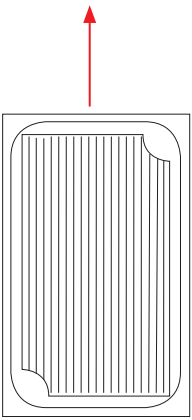

6 x 600 x 400

6 x GN 1/1

EQUIPMENT

- Climate Control-adjustable humidity
- Fan Control-adjustable speed
- Steam Control-adjustable chimney
- Delta T
- Opción Core Prober
- 6 Cooking phases
- Regeneration / Maintenance
- Recipe book
- Favorites
- Cool Down / Preheat
- Cycle end alarm
- Door safety switch
- Safety thermostat
- LED chamber light
- Water connection 3/4
- Folding inner glass for cleaning
- Reversing gear

FEATURES

Power		400 W
Gas power		13,5 kW_11620 Kcal/h
Max temperature		270° C
Weight		104 Kg.
Voltage		230 V - 50/60 Hz
Connection		SINGLE PHASE
Cooking chamber dimension		(W)490 x (D)655 x (H)630 mm.
External dimension		(W)815 x (D)880 x (H)1090 mm.
Distance between trays		80 mm.
RRP		
Change opening door		
Automatic washing system		
Core Prober		
Natural gas		Under request
Chimney diameter		ø 150 mm.

RXB 610

REF. 710085



10 x 600 x 400

10 x GN 1/1

EQUIPMENT

- Cycle end alarm
- Door safety switch
- Safety thermostat
- LED chamber light
- Water connection 3/4
- Folding inner glass for cleaning
- Reversing gear
- Timer 0-120 min. + continuous mode
- Adjustable humidity 0-100%

FEATURES

Power		13.650 W
Max temperature		250° C
Weight		109 Kg.
Voltage		400 V - 50/60 Hz
Connection		Three phase 3F + N + T
Cooking chamber dimension		(W)490 x (D)655 x (H)935 mm.
External dimension		(W)755 x (D)880 x (H)1235 mm.
Distance between trays		80 mm.
RRP		
Change opening door		

RXB 610 E

REF. 710426



10 x 600 x 400

10 x GN 1/1

EQUIPMENT


- Cycle end alarm
- Door safety switch
- Safety thermostat
- LED chamber light
- Water connection 3/4
- Folding inner glass for cleaning
- Reversing gear
- Timer 0-120 min. + continuous mode
- Adjustable humidity 0-100%
- Double fan speed
- Manual chimney control

FEATURES

Power		13.800 W
Max temperature		250° C
Weight		109 Kg.
Voltage		400 V - 50/60 Hz
Connection		Three phase 3F + N + T
Cooking chamber dimension		(W)490 x (D)655 x (H)935 mm.
External dimension		(W)755 x (D)880 x (H)1235 mm.
Distance between trays		80 mm.
RRP		
Change opening door		

RXB 610 V7

REF. 710362

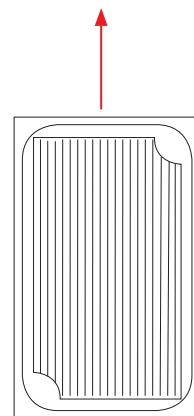

10 x 600 x 400

10 x GN 1/1

EQUIPMENT


- Climate Control-adjustable humidity
- Fan Control-adjustable speed
- Steam Control-adjustable chimney
- Delta T
- Optional: Core Prober
- 6 Cooking phases
- Regeneration / Maintenance
- Recipe book
- Favorites
- Cool Down / Preheat
- Cycle end alarm
- Door safety switch
- Safety thermostat
- LED chamber light
- Water connection $\frac{3}{4}$
- Folding inner glass for cleaning
- Reversing gear

FEATURES

Power		13.650 W
Max temperature		270° C
Weight		112 Kg.
Voltage		400 V - 50/60 Hz
Connection		Three phase 3F + N + T
Cooking chamber dimension		(W)490 x (D)655 x (H)935 mm.
External dimension		(W)815 x (D)880 x (H)1235 mm.
Distance between trays		80 mm.
RRP		
Change opening door		
Automatic washing system		
Core Prober		

RXB 610 GAS

REF. 710185

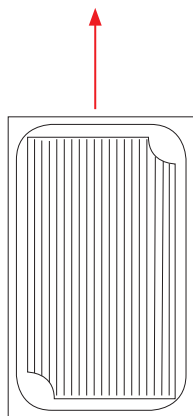

10 x 600 x 400

10 x GN 1/1

EQUIPMENT

- Cycle end alarm
- Door safety switch
- Safety thermostat
- Manual chimney control
- LED chamber light
- Water connection 3/4
- Folding inner glass for cleaning
- Reversing gear
- Timer 0-120 min. + continuous mode
- Adjustable humidity 0-100%

FEATURES

Power		600 W
Gas power		18 kW_15480 Kcal/h
Max temperature		250° C
Weight		127 Kg.
Voltage		230 V - 50/60 Hz
Connection		SINGLE PHASE
Cooking chamber dimension		(W)490 x (D)655 x (H)935 mm.
External dimension		(W)815 x (D)880 x (H)1395 mm.
Distance between trays		80 mm.
RRP		
Change opening door		
Natural gas		Under request
Chimney diameter		ø 150 mm.


RXB 610 V7 GAS

REF. 710315



10 x 600 x 400

10 x GN 1/1

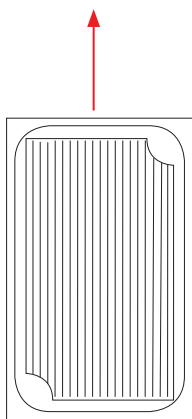

FEATURES

Power		600 W
Gas power		18 kW_15480 Kcal/h
Max temperature		270° C
Weight		127 Kg.
Voltage		230 V - 50/60 Hz
Connection		SINGLE PHASE
Cooking chamber dimension		(W)490 x (D)655 x (H)935 mm.
External dimension		(W)815 x (D)880 x (H)1395 mm.
Distance between trays		80 mm.
RRP		
Change opening door		
Automatic washing system		
Core Prober		
Natural gas		Under request
Chimney diameter		ø 150 mm.

EQUIPMENT

- Climate Control-adjustable humidity
- Fan Control-adjustable speed
- Steam Control-adjustable chimney
- Delta T
- Opción Core Prober
- 6 Cooking phases
- Regeneration / Maintenance
- Recipe book
- Favorites
- Cool Down / Preheat
- Cycle end alarm
- Door safety switch
- Safety thermostat
- LED chamber light
- Water connection ¾
- Folding inner glass for cleaning
- Reversing gear

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Киргизия (996)312-96-26-47 Казахстан (772)734-952-31 Таджикистан (992)427-82-92-69

<http://fmind.nt-rt.ru> || fdm@nt-rt.ru

BAKERY

HOSTELRY