



PROFESSIONAL HOSTELRY AND BAKERY

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70 Мурманск
(8152)59-64-93 Набережные
Челны (8552)20-53-41 Нижний
Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73 Омск
(3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64 Самара
(846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93


Киргизия (996)312-96-26-47 Казахстан (772)734-952-31 Таджикистан (992)427-82-92-69

<http://fmind.nt-rt.ru> || fdm@nt-rt.ru



GENERAL CATALOG



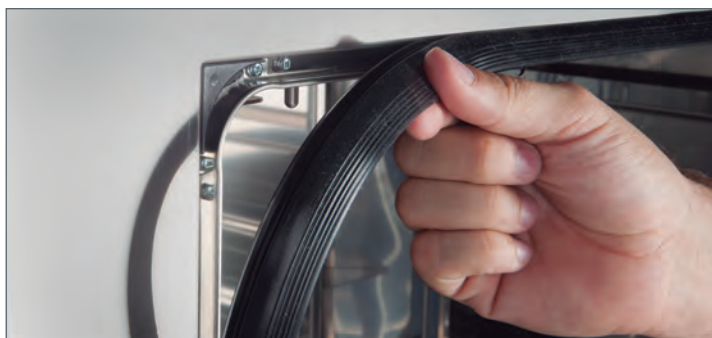

REMOVABLE DOOR GASKET

System that significantly increases seal life, provides the escape of heat from the oven, and hermetically close the door.



HINGE REINFORCEMENT

FM exclusive component that transmits the pressure to the hinge structure Inside of the oven, making reliable and durable this component.



HIGH DENSITY INSULATION

It provides more energy efficiency and increased thermal stability, reducing cooking/ baking cycle periods and extending thermostat and components life time.



MOTOR AND TURBINE

With the regularization of engines and turbines for all types of food, they provide more optimal and homogeneous results.



SAFETY ELECTRICAL CONNECTIONS

Coupling power wiring by screws, ensuring a perfect connection and prevents low-quality joints.



LOW EMISSION CRISTALS

This feature allows the incorporated glass decrease energy losses of the cooking cycle and safe manipulation of the oven door by lowering the temperature of the outer glass.



ROUNDED INSIDE CORNERS

Allow uniform air circulation and facilitate cleaning of the chamber, complying the HACCP norms.



INTUITIVE TOUCH SCREEN

Facilitates daily use and reduces learning time, focused to the most frequent cooking. Constant monitoring of all the processes.



SERIES **ST COMPACT**

pages 12 - 17 - *HOSTELRY*



SERIES **ST**

pages 18 - 32 - *HOSTELRY AND BAKERY*



SERIES **F**

pages 33 - 39 - *HOSTELRY*



SERIES **RXB**

pages 40 - 49 - *HOSTELRY AND BAKERY*



SERIES **RX**

pages 50 - 59 - *BAKERY*



SERIES **M/ME**

pages 60 - 67 - *BAKERY*



PROVER

pages 68 - 69



TOASTER

pages 70 - 73



PIZZA OVEN

pages 74 - 77



REGENERATOR

pages 78 - 81



GRILL

pages 82 - 83



ACCESORIES


pages 84 - 96

SMART SYSTEM



TOUCH SCREEN ST SERIES



- Temperature range 30°-270°
- Steam / combination / connection cooking
- Core probe
- Delta T
- Adjustable motor speed
- Recipe book
- Favorites
- Automatic program ignition
- Multicook / Multilevel



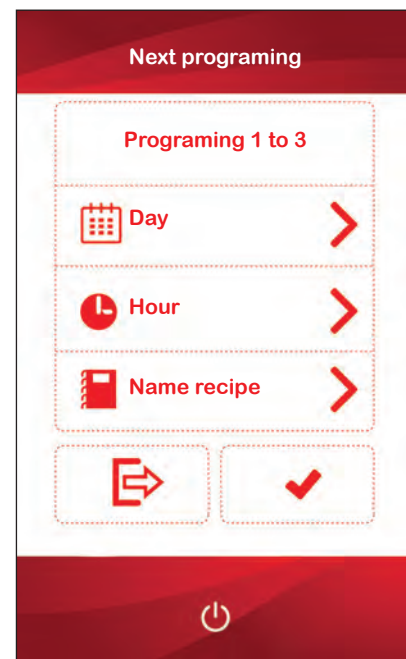


Program for automatic ignition switch on/off

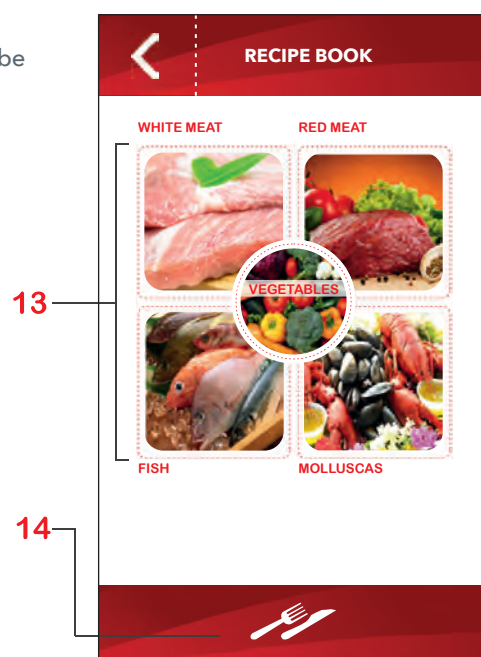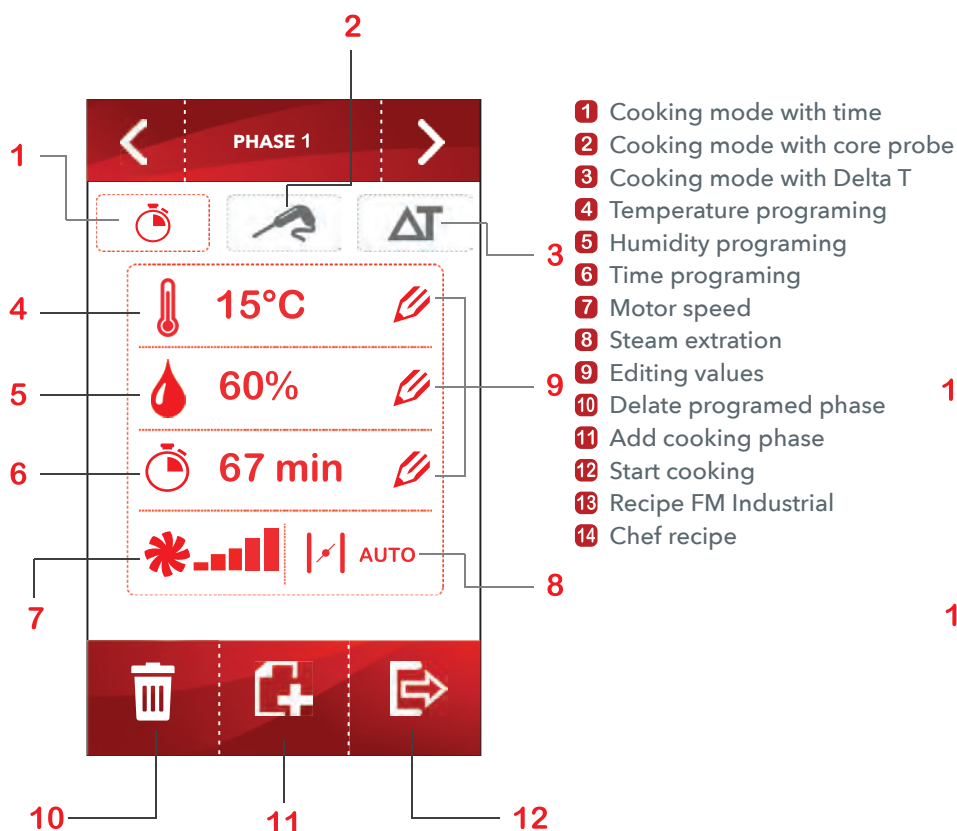

MULTICOOK

This system allow you to cook different food with different cooking time, letting you know as the trays are ready.

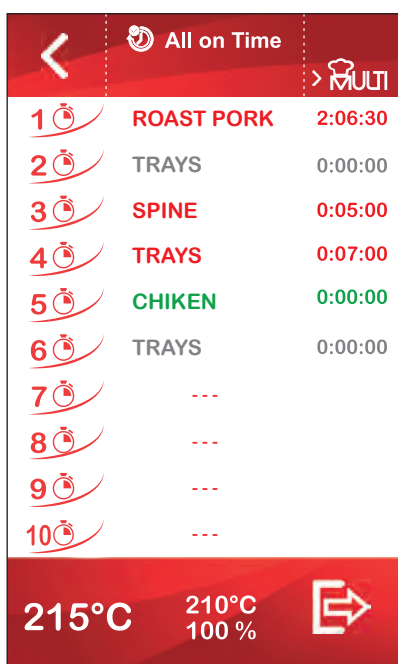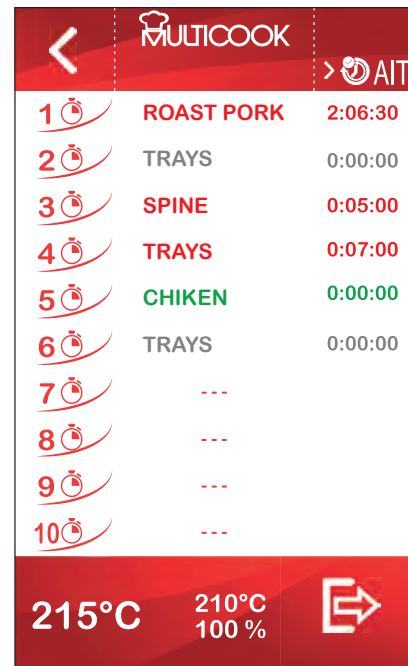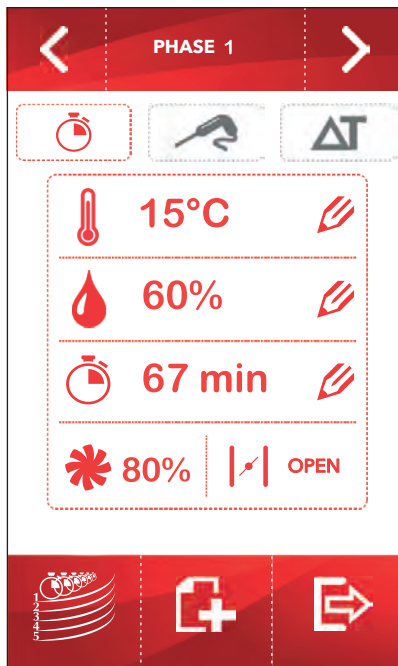

ALL ON TIME

*This function allow you to cook different food whit the end of the product at the same time, for this the oven tells as when to introduce each tray.
The result is the simultaneous completion of all foods.*



MANUAL COOKING

Set your cooking program for any food quickly and intuitively without the need to complicated processes for the elaboration of their recipes.




CLIMATE CONTROL

With the "Climate Control" system the oven will adapt the perfect climate in the cooking chamber to get desired finish in the food without the need for select cooking modes previously. Delete complex recipe processing processes, choose time, temperature, humidity and this system will do the rest.



FAN Adjustable-speed control

Thanks to the possibility of regulating the speed of the fans (up to 10 speeds) you can cook any type of food, however delicate it may be, thanks to the bi-directionality of the fan you will obtain a perfect cooking uniformity.



STEAM CONTROL

The Steam control system allows a controlled vapor outlet inside the chamber, managing to extract or maintain the humidity inside the chamber. This way we will be able to obtain uniform golds, perfect roasts of meat, gratin, etc.



DELTA T

Thanks to the constant temperature difference between the interior of the product and the cooking chamber, you will obtain homogeneous cooking in large pieces.



PRODUCT HEART PROBE


Always get the desired cooking point thanks to the precise reading and control of the temperature inside the food regardless of the size of the food.






Core Probe (vacuum probe)

With the vacuum core probe of only 1.5 mm in diameter, it will allow you to control the cooking temperature inside the product without breaking the vacuum process.




COOKING PHASES

With the phase programming you can set cooking at different temperatures and humidifies in the same cooking cycle. In this way you can cook the food and brown or gratin at the end of the process.




REGENERATION / MAINTENANCE

With this function we will be able to maintain the quality of the food by raising the refrigerated, frozen and packaged foods to a temperature of consumption in a short period of time.




RECIPE BOOK

All our ovens with Smart System V7 include a recipe with images and recipes already preset as standard. This recipe allows to be edited to suit each type of client.



FAVORITES

You will always have the last ten recipes used. To speed up the work you usually do.



COOL DOWN / PREHEAT

Quickly achieve the ideal cooking conditions inside the oven thanks to the Preheat (preheat) and Cool Down functions.



ST COMPACT

Minimo space, maximun results.

Get the maximun performance with the compact range in a minimun space.
You can steam, roast, fry browwn, fry, regenerate, and maintain.

STC 611

REF. 710365



NEW

ST COMPACT

new transversal line.

New compact ovens with transversal design and lower background.
The best result for your recipes in the smallest space
and with the best performance!

STC 611 W

REF. 710417




STC 423

REF. 710362



STC 411

REF. 710363

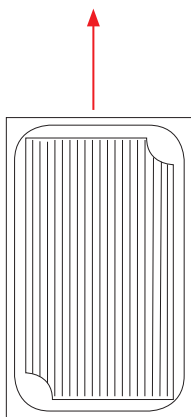

8 x GN 2/3 Prof. 20 | 4 x GN 2/3 Prof. 40 | 3 x GN 2/3 Prof. 65

8 x GN 1/1 Prof. 20 | 4 x GN 1/1 Prof. 40 | 3 x GN 1/1 Prof. 65

EQUIPMENT

- Climate Control-adjustable humidity
- Fan Control-adjustable speed
- Steam Control-adjustable chimney
- Delta T
- External Core Probe connection
- 6 Cooking phases
- Regeneration / Maintenance
- Recipe book
- Favorites
- Cool Down / Preheat
- Cycle end alarm
- Door sensor
- Safety thermostat
- LED chamber light
- Water connection 3/4"
- Folding inner glass for cleaning
- Reversing gear
- USB port
- HACCP
- Multi Level

FEATURES

Power		3.700 W
Max temperature		270° C
Weight		45 Kg.
Voltage		230 V - L+N - 50/60 Hz
Connection		SINGLE PHASE
Cooking chamber dimension		(W)356 x (D)385 x (H)302 mm.
External dimension		(W)515 x (D)620 x (H)580 mm.
RRP		
Change opening door		
Automatic washing system		Included
Core Probe		Included



FEATURES

Power		5.700 W
Max temperature		270° C
Weight		57 Kg.
Voltage		400 V - 3L+N - 50/60 Hz
Connection		THREE PHASE
Cooking chamber dimension		(W)356 x (D)560 x (H)302 mm.
External dimension		(W)515 x (D)795 x (H)580 mm.
RRP STC 411		
Change opening door		
Automatic washing system		Included
Core Probe		Included
RRP STC 411 ECO 710364		
Connection		SINGLE PHASE
Power		3700 W
Voltage		230 V - L+N - 50/60 Hz

STC 411 W

REF. 710416

NEW

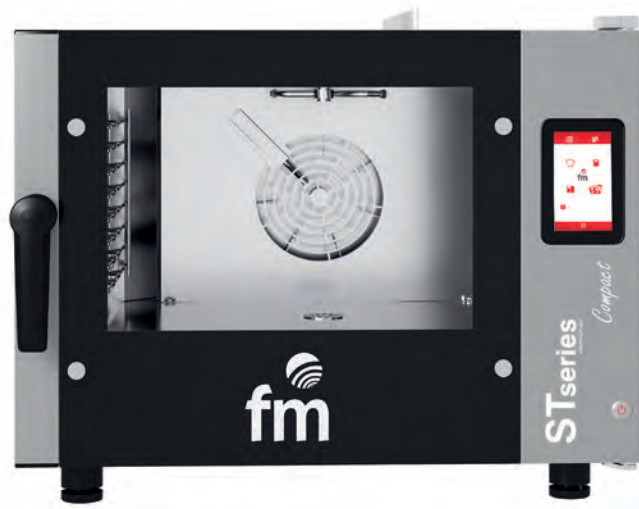

8 x GN 1/1 Prof. 20 4 x GN 1/1 Prof. 40 3 x GN 1/1 Prof. 65

EQUIPMENT

- Climate Control-adjustable humidity
- Fan Control-adjustable speed
- Steam Control-adjustable chimney
- Delta T
- External Core Probe connection
- 6 Cooking phases
- Regeneration / Maintenance
- Recipe book
- Favorites
- Cool Down / Preheat
- Cycle end alarm
- Door sensor
- Safety thermostat
- LED chamber light
- Water connection $\frac{3}{4}$
- Folding inner glass for cleaning
- Reversing gear
- USB port
- HACCP
- Multi Level



FEATURES

Power		5.700 W
Max temperature		270° C
Weight		57 Kg.
Voltage		400 V - 3L+N - 50/60 Hz
Connection		SINGLE PHASE / THREE PHASE
Cooking chamber dimension		(W)561 x (D)384 x (H)303 mm.
External dimension		(W)720 x (D)620 x (H)580 mm.
RRP STC 411 W		
Change opening door		
Automatic washing system		Included
Core Probe		Included
RRP STC 411 W ECO		
Connection		SINGLE PHASE
Power		3700 W
Voltage		230 V - L+N - 50/60 Hz

STC 611 W

REF. 710417

NEW

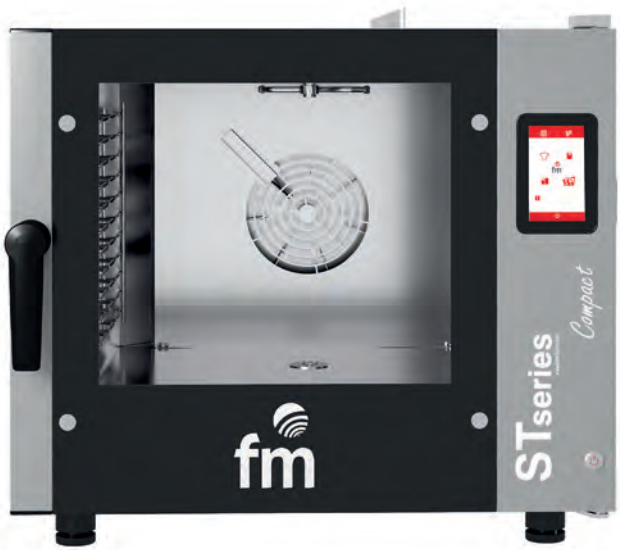

11 x GN 1/1 Prof. 20

6 x GN 1/1 Prof. 40

4 x GN 1/1 Prof. 65

EQUIPMENT

- Climate Control-adjustable humidity
- Fan Control-adjustable speed
- Steam Control-adjustable chimney
- Delta T
- External Core Probe connection
- 6 Cooking phases
- Regeneration / Maintenance
- Recipe book
- Favorites
- Cool Down / Preheat
- Cycle end alarm
- Door sensor
- Safety thermostat
- LED chamber light
- Water connection 3/4
- Folding inner glass for cleaning
- Reversing gear
- USB port
- HACCP
- Multi Level

FEATURES

Power		7.200 W
Max temperature		270° C
Weight		65 Kg.
Voltage		400 V - 3L+N - 50/60 Hz
Connection		Three phase 3F + N + T
Cooking chamber dimension		(W)561 x (D)384 x (H)385 mm.
External dimension		(W)720 x (D)620 x (H)665 mm.
RRP		
Change opening door		
Automatic washing system		Included
Core Probe		Included

STC 611

REF. 710365



11 x GN 1/1 Prof. 20 6 x GN 1/1 Prof. 40 4 x GN 1/1 Prof. 65

STC 1011

REF. 710366



19 x GN 1/1 Prof. 20 10 x GN 1/1 Prof. 40 6 x GN 1/1 Prof. 65

EQUIPMENT

- Climate Control-adjustable humidity
- Fan Control-adjustable speed
- Steam Control-adjustable chimney
- Delta T
- External Core Probe connection
- 6 Cooking phases
- Regeneration / Maintenance
- Recipe book
- Favorites
- Cool Down / Preheat
- Cycle end alarm
- Door sensor
- Safety thermostat
- LED chamber light
- Water connection 3/4
- Folding inner glass for cleaning
- Reversing gear
- USB port
- HACCP
- Multi Level

FEATURES

Power		7.200 W
Max temperature		270° C
Weight		65 Kg.
Voltage		400 V - 3L+N - 50/60 Hz
Connection		Three phase 3F + N + T
Cooking chamber dimension		(W)356 x (D)560 x (H)385 mm.
External dimension		(W)515 x (D)795 x (H)665 mm.
RRP		
Change opening door		
Automatic washing system		Included
Core Probe		Included

FEATURES

Power		11.400 W
Max temperature		270° C
Weight		90 Kg.
Voltage		400 V - 3L+N - 50/60 Hz
Connection		Three phase 3F + N + T
Cooking chamber dimension		(W)356 x (D)560 x (H)605 mm.
External dimension		(W)515 x (D)795 x (H)885 mm.
RRP		
Change opening door		
Automatic washing system		Included
Core Probe		Included



SERIES ST

MULTILEVEL MIXED OVENS



ST 604

REF. 710316



4 x 600 x 400

4 x GN 1/1

ST 604 GAS

REF. 710318



4 x 600 x 400

4 x GN 1/1

EQUIPMENT

- Cycle end alarm
- Door safety switch
- Safety thermostat
- Halogen chamber light
- Water connection 3/4"
- Folding inner glass for cleaning
- Reversing gear
- Double speed fan
- Timer 0-120 min. + continuous mode
- Adjustable humidity 0-100%

FEATURES

Power		7.500 W
Max temperature		250° C
Weight		85 Kg.
Voltage		400 V - 50/60 Hz
Connection		Three phase 3F + N + T
Cooking chamber dimension		(W)700 x (D)500 x (H)390 mm.
External dimension		(W)880 x (D)935 x (H)710 mm.
Distance between trays		80 mm.
RRP		
Change opening door		

FEATURES

Power		200 W
Gas power		9 kW_7740 Kcal/h
Max temperature		250° C
Weight		93 Kg.
Voltage		230 V - 50/60 Hz
Connection		SINGLE PHASE
Cooking chamber dimension		(W)700 x (D)500 x (H)390 mm.
External dimension		(W)880 x (D)935 x (H)900 mm.
Distance between trays		80 mm.
RRP		
Change opening door		
Natural gas		Under request
Chimney diameter		ø 100 mm.

ST 604 V7

REF. 710317



4 x 600 x 400

4 x GN 1/1

ST 604 V7 GAS

REF. 710294



4 x 600 x 400

4 x GN 1/1

EQUIPMENT

- Climate Control-adjustable humidity
- Fan Control-adjustable speed
- Steam Control-adjustable chimney
- Delta T
- External Core Probe connection
- Cooking phases
- Regeneration / Maintenance
- Recipe book
- Favorites
- Cool Down / Preheat
- Cycle end alarm
- Door sensor
- Safety thermostat
- LED chamber light
- Water connection 3/4
- Folding inner glass for cleaning
- Reversing gear
- USB port
- HACCP
- Multi Level

FEATURES

Power		7.500 W
Max temperature		270° C
Weight		90 Kg.
Voltage		400 V - 50/60 Hz
Connection		Three phase 3F + N + T
Cooking chamber dimension		(W)700 x (D)500 x (H)390 mm.
External dimension		(W)880 x (D)935 x (H)710 mm.
Distance between trays		80 mm.
RRP		
Change opening door		
Automatic washing system		Included
Core Prober		Included

FEATURES

Power		400 W
Gas power		9 kW_7740 Kcal/h
Max temperature		270° C
Weight		98 Kg.
Voltage		230 V - 50/60 Hz
Connection		SINGLE PHASE
Cooking chamber dimension		(W)700 x (D)500 x (H)390 mm.
External dimension		(W)880 x (D)935 x (H)900 mm.
Distance between trays		80 mm.
RRP		
Change opening door		
Automatic washing system		Included
Core Prober		Included
Natural gas		Under request
Chimney diameter		ø 100 mm.

ST 606

REF. 710319



6 x 600 x 400

6 x GN 1/1

ST 606 GAS

REF. 710320



6 x 600 x 400

6 x GN 1/1

EQUIPMENT

- Cycle end alarm
- Door safety switch
- Safety thermostat
- Halogen chamber light
- Water connection 3/4"
- Folding inner glass for cleaning
- Reversing gear
- Double speed fan
- Timer 0-120 min. + continuous mode
- Adjustable humidity 0-100%

FEATURES

Power		10.500 W
Max temperature		250° C
Weight		97 Kg.
Voltage		400 V - 50/60 Hz
Connection		Three phase 3F + N + T
Cooking chamber dimension		(W)700 x (D)500 x (H)550 mm.
External dimension		(W)880 x (D)935 x (H)870 mm.
Distance between trays		80 mm.
RRP		
Change opening door		

FEATURES

Power		400 W
Gas power		14 kW_12040 Kcal/h
Max temperature		250° C
Weight		108 Kg.
Voltage		230 V - 50/60 Hz
Connection		SINGLE PHASE
Cooking chamber dimension		(W)700 x (D)500 x (H)550 mm.
External dimension		(W)880 x (D)935 x (H)1060 mm.
Distance between trays		80 mm.
RRP		
Change opening door		
Natural gas		Under request
Chimney diameter		ø 150 mm.


ST 606 V7

REF. 710295



6 x 600 x 400

6 x GN 1/1



ST 606 V7 GAS

REF. 710321



6 x 600 x 400

6 x GN 1/1

EQUIPMENT

- Climate Control-adjustable humidity
- Fan Control-adjustable speed
- Steam Control-adjustable chimney
- Delta T
- External Core Probe connection
- 6 Cooking phases
- Regeneration / Maintenance
- Recipe book
- Favorites
- Cool Down / Preheat
- Cycle end alarm
- Door sensor
- Safety thermostat
- LED chamber light
- Water connection 3/4
- Folding inner glass for cleaning
- Reversing gear
- USB port
- HACCP
- Multi Level

FEATURES

Power		10.500 W
Max temperature		270° C
Weight		102 Kg.
Voltage		400 V - 50/60 Hz
Connection		Three phase 3F + N + T
Cooking chamber dimension		(W)700 x (D)500 x (H)550 mm.
External dimension		(W)880 x (D)935 x (H)870 mm.
Distance between trays		80 mm.
RRP		
Change opening door		
Automatic washing system		Included
Core Prober		Included

FEATURES

Power		400 W
Gas power		14 kW_12040 Kcal/h
Max temperature		270° C
Weight		113 Kg.
Voltage		230 V - 50/60 Hz
Connection		SINGLE PHASE
Cooking chamber dimension		(W)700 x (D)500 x (H)550 mm.
External dimension		(W)880 x (D)935 x (H)1060 mm.
Distance between trays		80 mm.
RRP		
Change opening door		
Automatic washing system		Included
Core Prober		Included
Natural gas		Under request
Chimney diameter		ø 150 mm.


ST 610

REF. 710296



10 x 600 x 400

10 x GN 1/1



ST 610 GAS

REF. 710323



10 x 600 x 400

10 x GN 1/1

EQUIPMENT

- Cycle end alarm
- Door safety switch
- Safety thermostat
- Halogen chamber light
- Water connection $\frac{3}{4}$
- Folding inner glass for cleaning
- Reversing gear
- Double speed fan
- Timer 0-120 min. + continuous mode
- Adjustable humidity 0-100%

FEATURES

Power		15.750 W
Max temperature		250° C
Weight		124 Kg.
Voltage		400 V - 50/60 Hz
Connection		Three phase 3F + N + T
Cooking chamber dimension		(W)700 x (D)500 x (H)870 mm.
External dimension		(W)880 x (D)935 x (H)1160 mm.
Distance between trays		80 mm.
RRP		
Change opening door		

FEATURES

Power		600 W
Gas power		18 kW_15840 Kcal/h
Max temperature		250° C
Weight		140 Kg.
Voltage		230 V - 50/60 Hz
Connection		SINGLE PHASE
Cooking chamber dimension		(W)700 x (D)500 x (H)870 mm.
External dimension		(W)880 x (D)935 x (H)1350 mm.
Distance between trays		80 mm.
RRP		
Change opening door		
Natural gas		Under request
Chimney diameter		ø 150 mm.

ST 610 V7

REF. 710322



10 x 600 x 400

10 x GN 1/1

ST 610 V7 GAS

REF. 710324



10 x 600 x 400

10 x GN 1/1

EQUIPMENT

- Climate Control-adjustable humidity
- Fan Control-adjustable speed
- Steam Control-adjustable chimney
- Delta T
- External Core Probe connection
- Cooking phases
- Regeneration / Maintenance
- Recipe book
- Favorites
- Cool Down / Preheat
- Cycle end alarm
- Door sensor
- Safety thermostat
- LED chamber light
- Water connection 3/4
- Folding inner glass for cleaning
- Reversing gear
- USB port
- HACCP
- Multi Level

FEATURES

Power		15.750 W
Max temperature		270° C
Weight		129 Kg.
Voltage		400 V - 50/60 Hz
Connection		Three phase 3F + N + T
Cooking chamber dimension		(W)700 x (D)500 x (H)870 mm.
External dimension		(W)880 x (D)935 x (H)1160 mm.
Distance between trays		80 mm.
RRP		
Change opening door		
Automatic washing system		Included
Core Prober		Included

FEATURES


Power		600 W
Gas power		18 kW_15840 Kcal/h
Max temperature		270° C
Weight		145 Kg.
Voltage		230 V - 50/60 Hz
Connection		SINGLE PHASE
Cooking chamber dimension		(W)700 x (D)500 x (H)870 mm.
External dimension		(W)880 x (D)935 x (H)1350 mm.
Distance between trays		80 mm.
RRP		
Change opening door		
Automatic washing system		Included
Core Prober		Included
Natural gas		Under request
Chimney diameter		ø 150 mm.

ST 721

REF. 710414



7 x GN 2/1



ST 1221

REF. 710420



12 x GN 2/1

EQUIPMENT

- Cycle end alarm
- Door safety switch
- Safety thermostat
- Halogen chamber light
- Water connection $\frac{3}{4}$
- Folding inner glass for cleaning
- Reversing gear
- Double speed fan
- Timer 0-120 min. + continuous mode
- Adjustable humidity 0-100%

FEATURES

Power		18.500 W
Max temperature		250° C
Weight		118 Kg.
Voltage		400 V - 50/60 Hz
Connection		Three phase 3F + N + T
Cooking chamber dimension		(W)700 x (D)744 x (H)550 mm.
External dimension		(W)880 x (D)1227 x (H)870 mm.
Distance between trays		70 mm.
RRP		
Change opening door		

FEATURES

Power		27.750 W
Max temperature		250° C
Weight		162 Kg.
Voltage		400 V - 50/60 Hz
Connection		Three phase 3F + N + T
Cooking chamber dimension		(W)700 x (D)744 x (H)870 mm.
External dimension		(W)880 x (D)1227 x (H)1160 mm.
Distance between trays		70 mm.
RRP		
Change opening door		

ST 721 V7

REF. 710418



7 x GN 2/1

ST 1221 V7

REF. 710419



12 x GN 2/1

EQUIPMENT

- Climate Control-adjustable humidity
- Fan Control-adjustable speed
- Steam Control-adjustable chimney
- Delta T
- External Core Probe connection
- Cooking phases
- Regeneration / Maintenance
- Recipe book
- Favorites
- Cool Down / Preheat
- Cycle end alarm
- Door sensor
- Safety thermostat
- LED chamber light
- Water connection $\frac{3}{4}$
- Folding inner glass for cleaning
- Reversing gear
- USB port
- HACCP
- Multi Level

FEATURES

Power		18.500 W
Max temperature		270° C
Weight		124 Kg.
Voltage		230 V - 50/60 Hz
Connection		SINGLE PHASE
Cooking chamber dimension		(W)700 x (D)744 x (H)550 mm.
External dimension		(W)880 x (D)1227 x (H)870 mm.
Distance between trays		70 mm.
RRP		
Change opening door		
Automatic washing system		Included
Core Prober		Included

FEATURES


Power		27.750 W
Max temperature		270° C
Weight		170 Kg.
Voltage		230 V - 50/60 Hz
Connection		SINGLE PHASE
Cooking chamber dimension		(W)700 x (D)744 x (H)870 mm.
External dimension		(W)880 x (D)1227 x (H)1160 mm.
Distance between trays		70 mm.
RRP		
Change opening door		
Automatic washing system		Included
Core Prober		Included

ST 616 V7

REF. 710325



16 x 600 x 400



EQUIPMENT


- Climate Control-adjustable humidity
- Fan Control-Fan Control-adjustable speed
- Steam Control-adjustable chimney
- Delta T
- Cooking phases
- Regeneration / Maintenance
- Recipe book
- Favorites
- Cool Down / Preheat
- Cycle end alarm
- Door sensor
- Safety thermostat
- LED chamber light
- Water connection 3/4
- Folding inner glass for cleaning
- Reversing gear
- USB port
- External Core Probe connection
- HACCP
- Multi Level

FEATURES

Capacity		16 x 600 x 400 - 16 x GN 1/1
Power		28.750 W
Max temperature		270° C
Weight		206 Kg.
Voltage		400 V - 50/60 Hz
Connection		Three phase 3F + N + T
Cooking chamber dimension		(W)700 x (D)500 x (H)1470 mm.
External dimension		(W)880 x (D)960 x (H)1865 mm.
Distance between trays		80 mm.
RRP		
Change opening door		
Automatic washing system		Included
Core Prober		Included

ST 616 V7 GAS

REF. 710326



EQUIPMENT


- Climate Control-adjustable humidity
- Fan Control-Fan Control-adjustable speed
- Steam Control-adjustable chimney
- Delta T
- Cooking phases
- Regeneration / Maintenance
- Recipe book
- Favorites
- Cool Down / Preheat
- Cycle end alarm
- Door sensor
- Safety thermostat
- LED chamber light
- Water connection $\frac{3}{4}$
- Folding inner glass for cleaning
- Reversing gear
- USB port
- External Core Probe connection
- HACCP
- Multi Level

FEATURES

Capacity		16 x 600 x 400 - 16 x GN 1/1
Power		1.000 W
Gas power		33 kW_28380 Kcal/h
Max temperature		270° C
Weight		252 Kg.
Voltage		230 V - 50/60 Hz
Connection		SINGLE PHASE
Cooking chamber dimension		(W)700 x (D)500 x (H)1470 mm.
External dimension		(W)880 x (D)1000 x (H)2055 mm.
Distance between trays		80 mm.
RRP		
Change opening door		
Automatic washing system		Included
Core Prober		Included
Natural gas		Under request
Chimney diameter		ø 180 mm.

STANDS PORTATRAYS FIJOS

TROLLEY PORTATRAYS EXTRAIBLE INCLUIDO




EQUIPMENT

- Climate Control-adjustable humidity
- Fan Control-Fan Control-adjustable speed
- Steam Control-adjustable chimney
- Delta T
- External Core Probe connection
- 6 Cooking phases
- Regeneration / Maintenance
- Recipe book
- Favorites
- Cool Down / Preheat
- Cycle end alarm
- Door sensor
- Safety thermostat
- LED chamber light
- Water connection 3/4
- Folding inner glass for cleaning
- Reversing gear
- USB port
- HACCP
- Multi Level

FEATURES	ST-616-V7-T Ref. 710297	ST-211-V7 Ref. 710329	ST-211-V7-T Ref. 710330	ST-221-V7 Ref. 710333	ST-221-V7-T Ref. 710334
Capacity	16 x 600 x 400	20 x Gn 1/1	20 x Gn 1/1	20 x Gn 2/1 40 x Gn 1/1	20 x Gn 2/1 40 x Gn 1/1
Power	28.750 W	28.750 W	28.750 W	46.250 W	46.250 W
Gas power	-	-	-	-	-
Max temperature	270° C	270° C	270° C	270° C	270° C
Weight	198 Kg.	206 Kg.	206 Kg.	244 Kg.	232 Kg.
Voltage	400 V - 50/60 Hz	400 V - 50/60 Hz	400 V - 50/60 Hz	400 V - 50/60 Hz	400 V - 50/60 Hz
Connection	Three phase 3F + N + T	Three phase 3F + N + T	Three phase 3F + N + T	Three phase 3F + N + T	Three phase 3F + N + T
Cooking chamber dimension	(W)700x(D)500x(H)1470 mm.	(W)700x(D)500x(H)1470 mm.	(W)700x(D)500x(H)1470 mm.	(W)700x(D)740x(H)1470 mm.	(W)700x(D)740x(H)1470 mm.
External dimension	(W)880x(D)960x(H)1850 mm.	(W)880x(D)960x(H)1865 mm.	(W)880x(D)960x(H)1865 mm.	(W)880x(D)1200x(H)1865 mm.	(W)880x(D)1200x(H)1865 mm.
Distance between trays	80 mm.	65 mm.	65 mm.	65 mm.	65 mm.
RRP					
Change opening door					
Automatic washing system	Included	Included	Included	Included	Included
Core Prober	Included	Included	Included	Included	Included
Natural gas	-	-	-	-	-
Chimney diameter	-	-	-	-	-
Trolley	✓	✗	✓	✗	✓

STANDS PORTATRAYS FIJOS

TROLLEY PORTATRAYS EXTRAIBLE INCLUIDO



EQUIPMENT

- Climate Control-adjustable humidity
- Fan Control-Fan Control-adjustable speed
- Steam Control-adjustable chimney
- Delta T
- External Core Probe connection
- 6 Cooking phases
- Regeneration / Maintenance
- Recipe book
- Favorites
- Cool Down / Preheat
- Cycle end alarm
- Door sensor
- Safety thermostat
- LED chamber light
- Water connection 3/4
- Folding inner glass for cleaning
- Reversing gear
- USB port
- HACCP
- Multi Level

FEATURES	ST-616-V7-GAS-T Ref. 710303	ST-211-V7-GAS Ref. 710331	ST-211-V7-GAS-T Ref. 710332	ST-221-V7-GAS Ref. 710335	ST-221-V7-GAS-T Ref. 710336
Capacity	16 x 600 x 400	20 x Gn 1/1	20 x Gn 1/1	20 x Gn 2/1 40 x Gn 1/1	20 x Gn 2/1 40 x Gn 1/1
Power	1.000 W	1.000 W	1.000 W	1.000 W	1.000 W
Gas power	33 Kw_28380 Kcal/h	33 Kw_28380 Kcal/h	33 Kw_28380 Kcal/h	50 Kw_43000 Kcal/h	50 Kw_43000 Kcal/h
Max temperature	270° C	270° C	270° C	270° C	270° C
Weight	244 Kg.	252 Kg.	244 Kg.	300 Kg.	288 Kg.
Voltage	230 V - 50/60 Hz	230 V - 50/60 Hz	230 V - 50/60 Hz	230 V - 50/60 Hz	230 V - 50/60 Hz
Connection	Shuko SINGLE PHASE	Shuko SINGLE PHASE	Shuko SINGLE PHASE	Shuko SINGLE PHASE	Shuko SINGLE PHASE
Cooking chamber dimension	(W)700x(D)500x(H)1470 mm.	(W)700x(D)500x(H)1470 mm.	(W)700x(D)500x(H)1470 mm.	(W)700x(D)740x(H)1470 mm.	(W)700x(D)740x(H)1470 mm.
External dimension	(W)880x(D)1000x(H)2055 mm.	(W)880x(D)1000x(H)2055 mm.	(W)880x(D)1000x(H)2055 mm.	(W)880x(D)1240x(H)2055mm.	(W)880x(D)1240x(H)2055mm.
Distance between trays	80 mm.	65 mm.	65 mm.	65 mm.	65 mm.
RRP					
Change opening door					
Automatic washing system	Included	Included	Included	Included	Included
Core Prober	Included	Included	Included	Included	Included
Natural gas	Under request	Under request	Under request	Under request	Under request
Chimney diameter	ø 180 mm.	ø 180 mm.	ø 180 mm.	ø 200 mm.	ø 200 mm.
Trolley	✓	✗	✓	✗	✓

COMPOSITION ST

Hood ST + ST 606 V7 + Stand ST 650




CONTROL PANEL


NEW

BAKERY

HOSTELRY

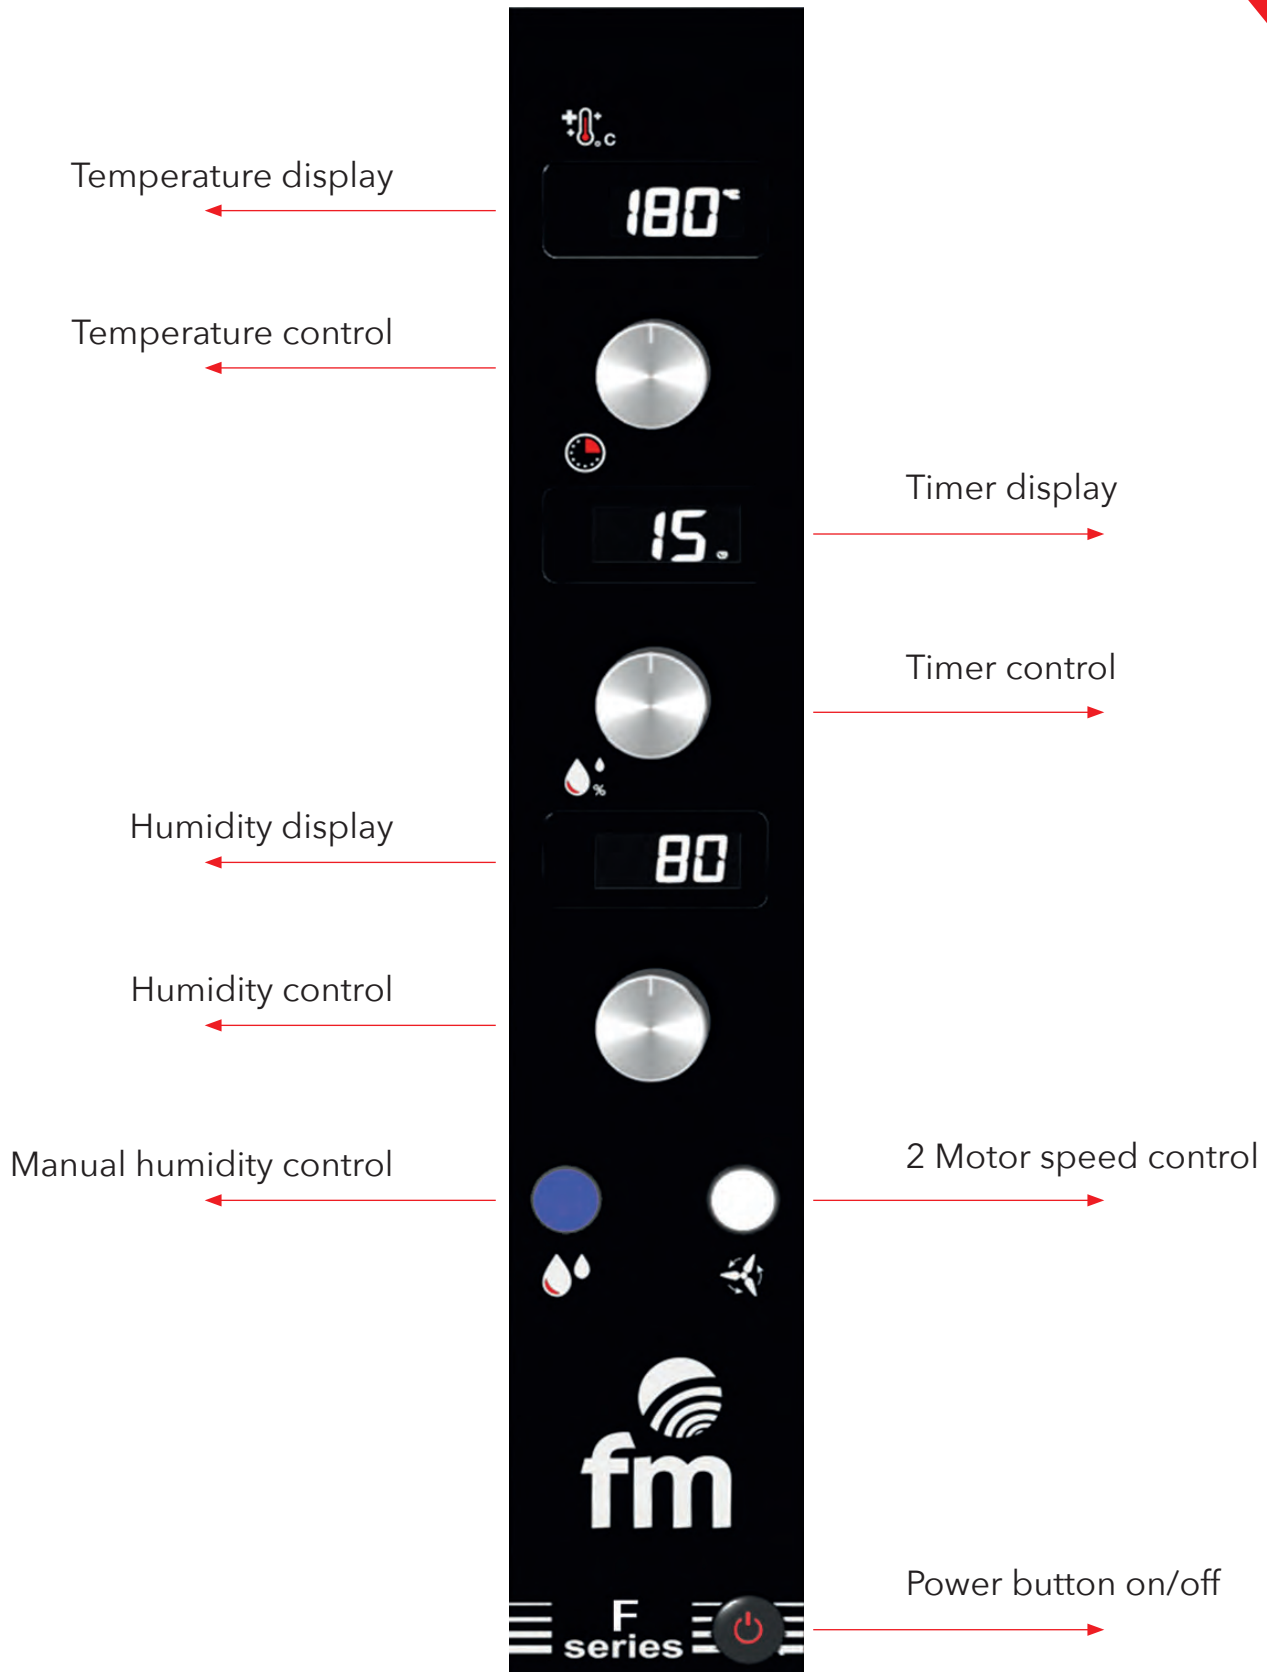



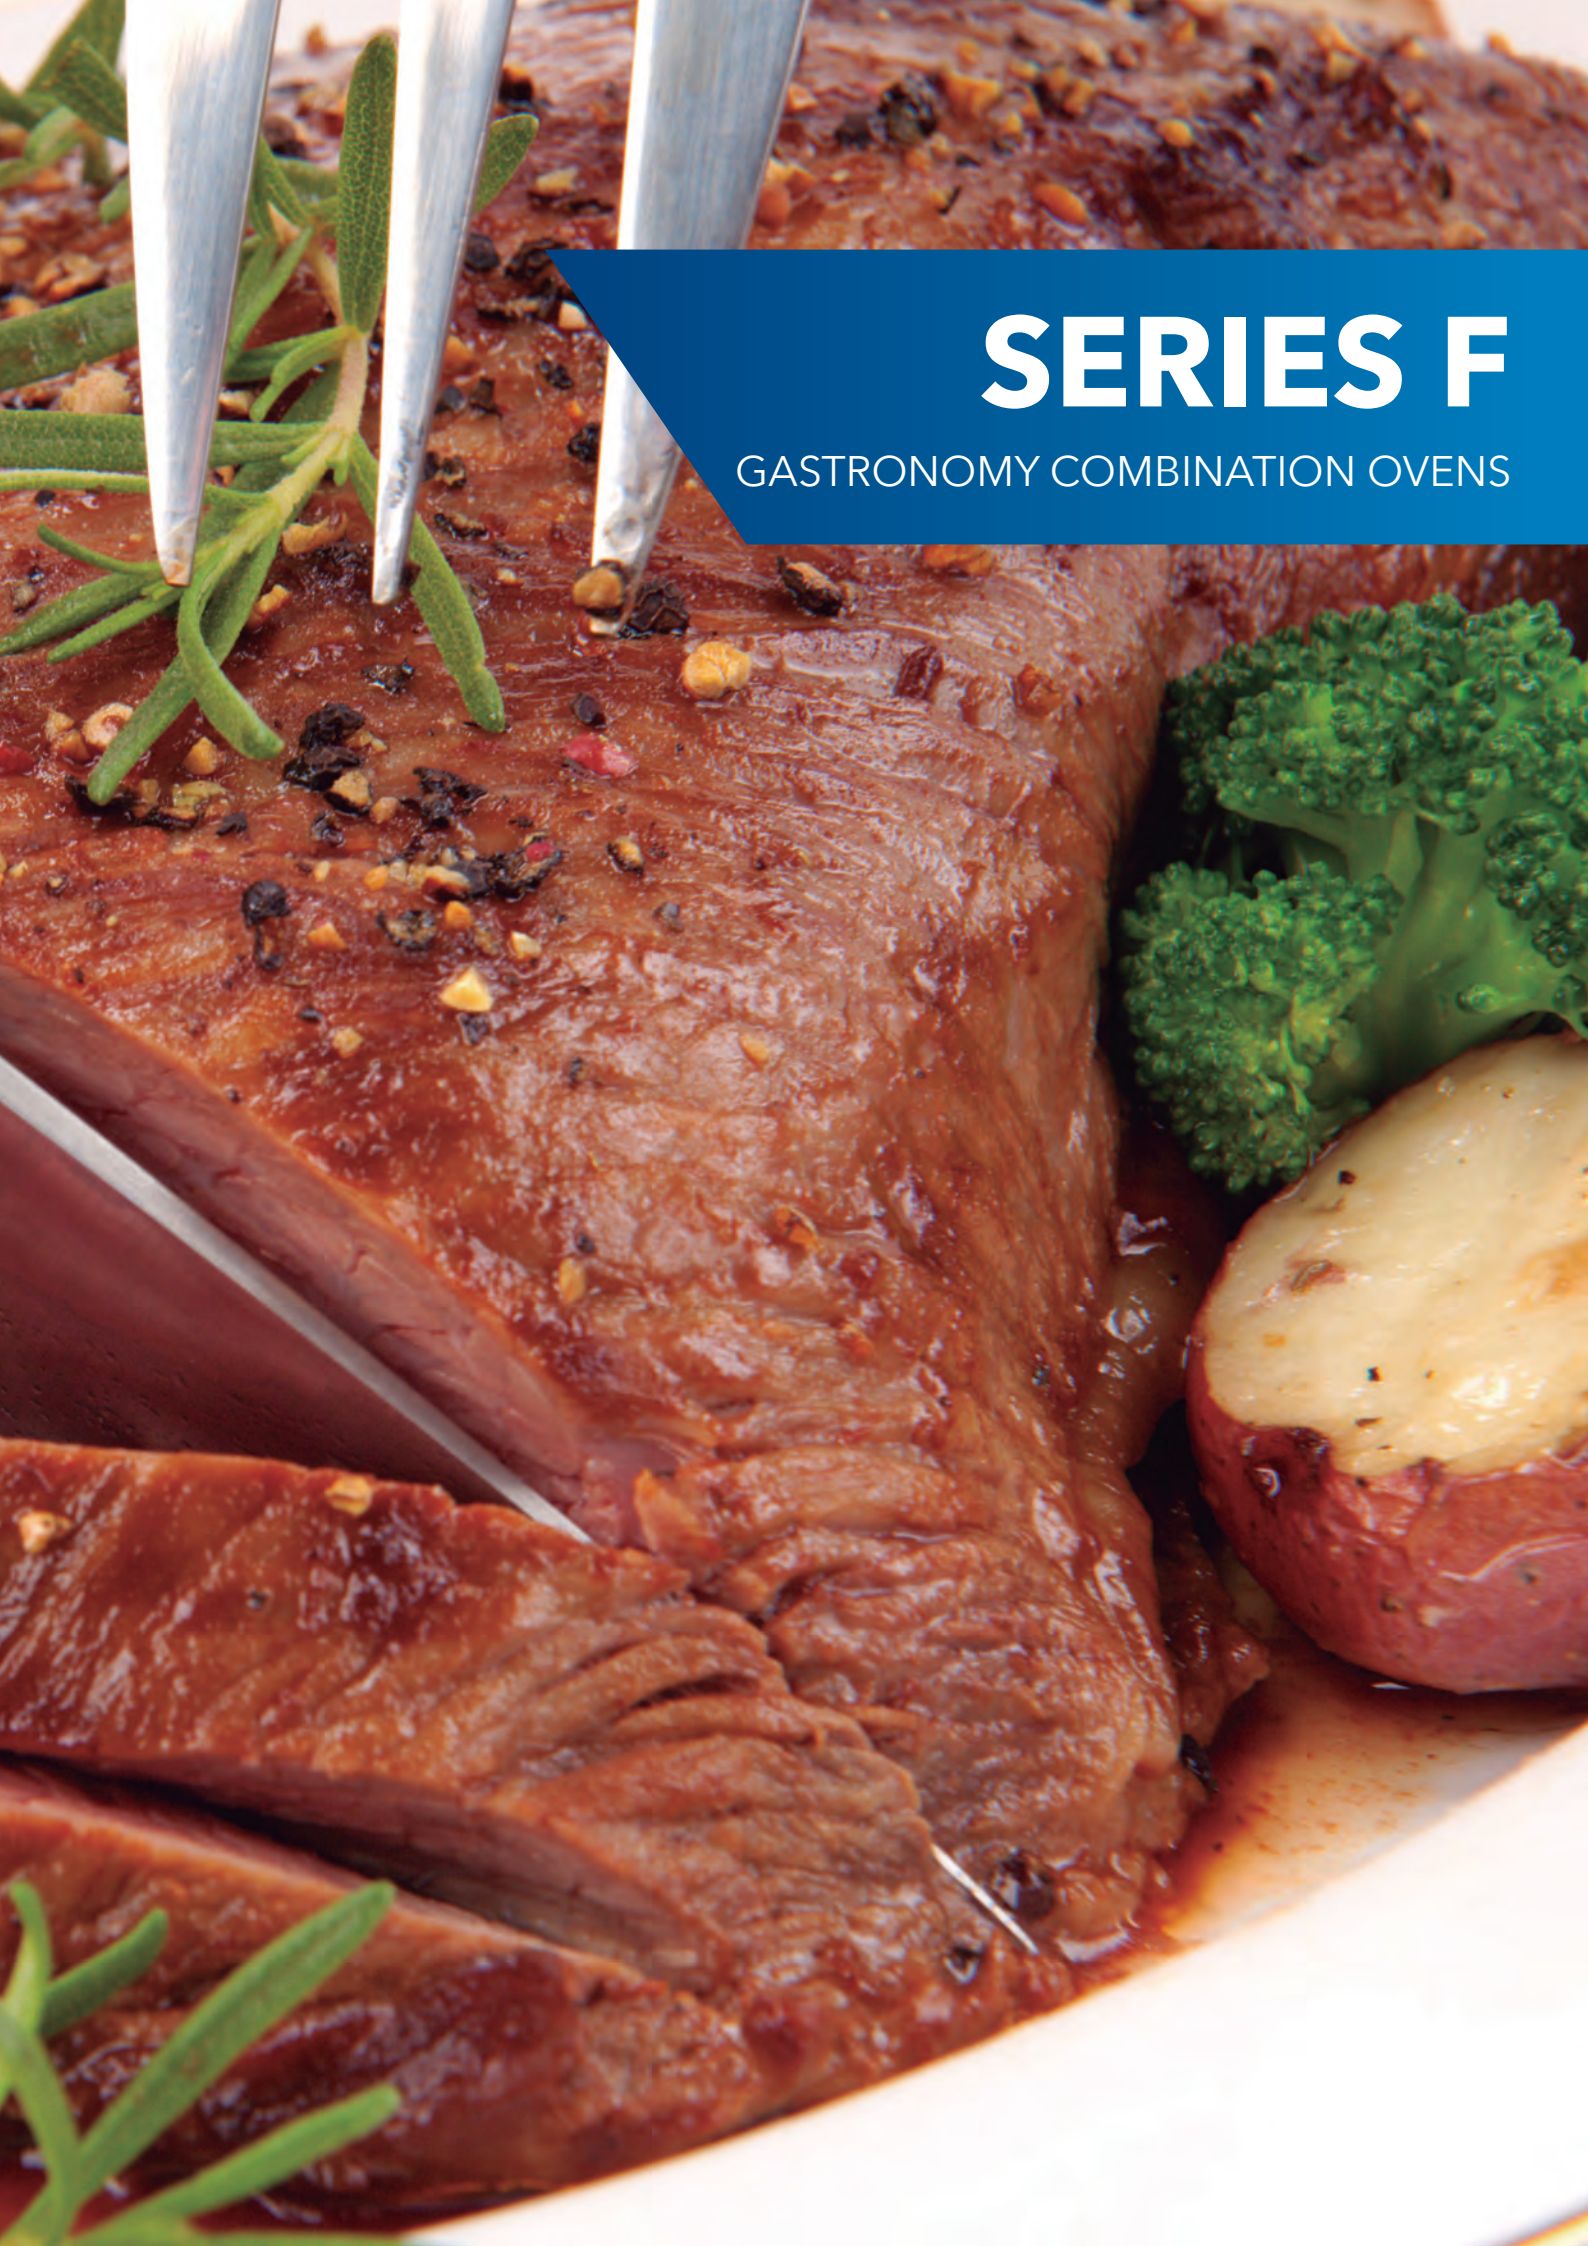


SERIES F

GASTRONOMY COMBINATION OVENS

F 104

REF. 710012

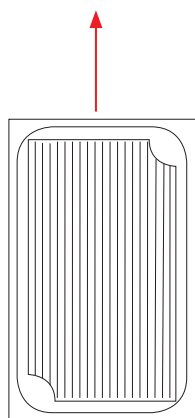

4 x GN 2/3

EQUIPMENT

- Cycle end alarm
- Door safety switch
- Safety thermostat
- Manual chimney control
- LED chamber light
- Water connection 3/4
- Folding inner glass for cleaning
- Reversing gear
- Timer 0-120 min. + continuous mode
- Adjustable humidity 0-100%

FEATURES

Capacity		4 x GN 2/3
Power		5.150 W
Max temperature		250° C
Weight		52 Kg.
Voltage		400 / 230 V - 50/60 Hz
Connection		Three phase 3F + N + T
Cooking chamber dimension		(W)380 x (D)380 x (H)365 mm.
External dimension		(W)650 x (D)715 x (H)600 mm.
Distance between trays		65 mm.
RRP		
Change opening door		

F 106

REF. 710013




6 x GN 1/1

F 110

REF. 710014



10 x GN 1/1

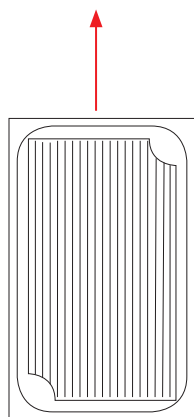

EQUIPMENT

- Cycle end alarm
- Door safety switch
- Safety thermostat
- Manual chimney control
- LED chamber light
- Water connection $\frac{3}{4}$
- Folding inner glass for cleaning
- Reversing gear
- Timer 0-120 min. + continuous mode
- Adjustable humidity 0-100%

FEATURES

Capacity	6 x GN 1/1
Power	9.200 W
Max temperature	250° C
Weight	65 Kg.
Voltage	400 / 230 V - 50/60 Hz
Connection	Three phase 3F + N + T
Cooking chamber dimension	(W)395 x (D)590 x (H)480 mm.
External dimension	(W)660 x (D)825 x (H)780 mm.
Distance between trays	65 mm.
RRP	
Change opening door	

FEATURES

Capacity	10 x GN 1/1
Power	15.400 W
Max temperature	250° C
Weight	97 Kg.
Voltage	400 V - 50/60 Hz
Connection	Three phase 3F + N + T
Cooking chamber dimension	(W)395 x (D)590 x (H)810 mm.
External dimension	(W)660 x (D)825 x (H)1020 mm.
Distance between trays	65 mm.
RRP	
Change opening door	

F 106 E

REF. 710427




6 x GN 1/1

F 110 E

REF. 710428



10 x GN 1/1

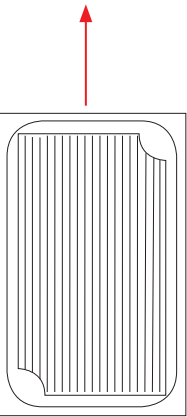

EQUIPMENT

- Cycle end alarm
- Door safety switch
- Safety thermostat
- LED chamber light
- Water connection 3/4
- Folding inner glass for cleaning
- Reversing gear
- Double fan speed
- Timer 0-120 min. + continuous mode
- Manual chimney control
- Adjustable humidity 0-100%

FEATURES

Power		9.200 W
Max temperature		250° C
Weight		65 Kg.
Voltage		400 / 230 V - 50/60 Hz
Connection		Three phase 3F + N + T
Cooking chamber dimension		(W)395 x (D)590 x (H)480 mm.
External dimension		(W)660 x (D)825 x (H)780 mm.
Distance between trays		65 mm.
RRP		
Change opening door		

FEATURES

Power		15.400 W
Max temperature		250° C
Weight		97 Kg.
Voltage		400 V - 50/60 Hz
Connection		Three phase 3F + N + T
Cooking chamber dimension		(W)395 x (D)590 x (H)811 mm.
External dimension		(W)660 x (D)825 x (H)1110 mm.
Distance between trays		65 mm.
RRP		
Change opening door		

F 106 V7

REF. 710255




6 x GN 1/1

F 110 V7

REF. 710190



10 x GN 1/1

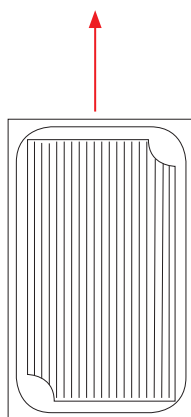

EQUIPMENT

- Climate Control-adjustable humidity
- Fan Control-adjustable speed
- Steam Control-adjustable chimney
- Delta T
- Core Prober
- 6 Cooking phases
- Regeneration / Maintenance
- Recipe book
- Favorites
- Cool Down / Preheat
- Cycle end alarm
- Door safety switch
- Safety thermostat
- LED chamber light
- Water connection 3/4
- Folding inner glass for cleaning
- Reversing gear

FEATURES

Power		9.200 W
Max temperature		270° C
Weight		80 Kg.
Voltage		400 V - 50/60 Hz
Connection		Three phase 3F + N + T
Cooking chamber dimension		(W)395 x (D)590 x (H)480 mm.
External dimension		(W)725 x (D)815 x (H)690 mm.
Distance between trays		65 mm.
RRP		
Change opening door		
Automatic washing system		700 €
Core Prober		Included

FEATURES

Power		15.400 W
Max temperature		270° C
Weight		97 Kg.
Voltage		400 V - 50/60 Hz
Connection		Three phase 3F + N + T
Cooking chamber dimension		(W)395 x (D)590 x (H)810 mm.
External dimension		(W)725 x (D)815 x (H)1020 mm.
Distance between trays		65 mm.
RRP		
Change opening door		
Automatic washing system		
Core Prober		Included

SERIES RXB

MIXED OVENS





RXB 606

REF. 710084



6 x 600 x 400

6 x GN 1/1

EQUIPMENT

- Cycle end alarm
- Door safety switch
- Safety thermostat
- LED chamber light
- Water connection ¾
- Manual chimney control
- Folding inner glass for cleaning
- Reversing gear
- Timer 0-120 min. Continuous mode
- Adjustable humidity 0-100%

FEATURES

Power		9.100 W
Max temperature		250° C
Weight		90 Kg.
Voltage		400 V - 50/60 Hz
Connection		Three phase 3F + N + T
Cooking chamber dimension		(W)490 x (D)655 x (H)630 mm.
External dimension		(W)755 x (D)880 x (H)930 mm.
Distance between trays		80 mm.
RRP		
Change opening door		

RXB 606 E

REF. 710425



6 x 600 x 400

6 x GN 1/1

EQUIPMENT


- Cycle end alarm
- Door safety switch
- Safety thermostat
- LED chamber light
- Water connection ¾
- Double fan speed
- Adjustable humidity 0-100%
- Folding inner glass for cleaning
- Reversing gear
- Timer 0-120 min. Continuous mode
- Manual chimney control

FEATURES

Power		9.100 W
Max temperature		250° C
Weight		90 Kg.
Voltage		400 V - 50/60 Hz
Connection		Three phase 3F + N + T
Cooking chamber dimension		(W)490 x (D)655 x (H)630 mm.
External dimension		(W)755 x (D)880 x (H)930 mm.
Distance between trays		80 mm.
RRP		
Change opening door		

RXB 606 V7

REF. 710186

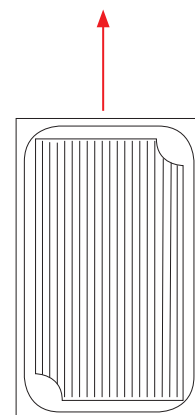

6 x 600 x 400

6 x GN 1/1

EQUIPMENT


- Climate Control-adjustable humidity
- Fan Control-Fan Control-adjustable speed
- Steam Control-adjustable chimney
- Delta T
- Optional: Core Prober
- Cooking phases
- Regeneration / Maintenance
- Recipe book
- Favorites
- Cool Down / Preheat
- Cycle end alarm
- Door safety switch
- Safety thermostat
- LED chamber light
- Water connection ¾
- Folding inner glass for cleaning
- Reversing gear

FEATURES

Power		9.100 W
Max temperature		270° C
Weight		92 Kg.
Voltage		400 V - 50/60 Hz
Connection		Three phase 3F + N + T
Cooking chamber dimension		(W)490 x (D)655 x (H)630 mm.
External dimension		(W)815 x (D)880 x (H)930 mm.
Distance between trays		80 mm.
RRP		
Change opening door		
Automatic washing system		
Core Prober		

RXB 606 GAS

REF. 710253

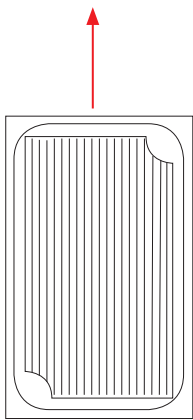

6 x 600 x 400

6 x GN 1/1

EQUIPMENT


- Cycle end alarm
- Door safety switch
- Safety thermostat
- Manual chimney control
- LED chamber light
- Water connection 3/4
- Folding inner glass for cleaning
- Reversing gear
- Timer 0-120 min. + continuous mode
- Adjustable humidity 0-100%

FEATURES

Power		400 W
Gas power		13,5 kW_11620 Kcal/h
Max temperature		250° C
Weight		104 Kg.
Voltage		220 V - 50/60 Hz
Connection		SINGLE PHASE
Cooking chamber dimension		(W)490 x (D)655 x (H)630 mm.
External dimension		(W)815 x (D)880 x (H)1090 mm.
Distance between trays		80 mm.
RRP		
Change opening door		
Natural gas		Under request
Chimney diameter		ø 150 mm.

RXB 606 V7 GAS

REF. 710314

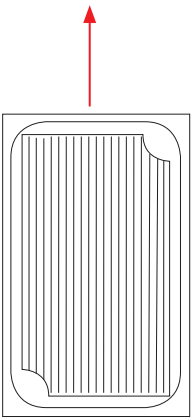

6 x 600 x 400

6 x GN 1/1

EQUIPMENT

- Climate Control-adjustable humidity
- Fan Control-adjustable speed
- Steam Control-adjustable chimney
- Delta T
- Opción Core Prober
- 6 Cooking phases
- Regeneration / Maintenance
- Recipe book
- Favorites
- Cool Down / Preheat
- Cycle end alarm
- Door safety switch
- Safety thermostat
- LED chamber light
- Water connection 3/4
- Folding inner glass for cleaning
- Reversing gear

FEATURES

Power		400 W
Gas power		13,5 kW_11620 Kcal/h
Max temperature		270° C
Weight		104 Kg.
Voltage		230 V - 50/60 Hz
Connection		SINGLE PHASE
Cooking chamber dimension		(W)490 x (D)655 x (H)630 mm.
External dimension		(W)815 x (D)880 x (H)1090 mm.
Distance between trays		80 mm.
RRP		
Change opening door		
Automatic washing system		
Core Prober		
Natural gas		Under request
Chimney diameter		ø 150 mm.

RXB 610

REF. 710085



10 x 600 x 400

10 x GN 1/1

EQUIPMENT

- Cycle end alarm
- Door safety switch
- Safety thermostat
- LED chamber light
- Water connection 3/4"
- Folding inner glass for cleaning
- Reversing gear
- Timer 0-120 min. + continuous mode
- Adjustable humidity 0-100%

FEATURES

Power		13.650 W
Max temperature		250° C
Weight		109 Kg.
Voltage		400 V - 50/60 Hz
Connection		Three phase 3F + N + T
Cooking chamber dimension		(W)490 x (D)655 x (H)935 mm.
External dimension		(W)755 x (D)880 x (H)1235 mm.
Distance between trays		80 mm.
RRP		
Change opening door		

RXB 610 E

REF. 710426



10 x 600 x 400

10 x GN 1/1

EQUIPMENT


- Cycle end alarm
- Door safety switch
- Safety thermostat
- LED chamber light
- Water connection 3/4"
- Folding inner glass for cleaning
- Reversing gear
- Timer 0-120 min. + continuous mode
- Adjustable humidity 0-100%
- Double fan speed
- Manual chimney control

FEATURES

Power		13.800 W
Max temperature		250° C
Weight		109 Kg.
Voltage		400 V - 50/60 Hz
Connection		Three phase 3F + N + T
Cooking chamber dimension		(W)490 x (D)655 x (H)935 mm.
External dimension		(W)755 x (D)880 x (H)1235 mm.
Distance between trays		80 mm.
RRP		
Change opening door		

RXB 610 V7

REF. 710362

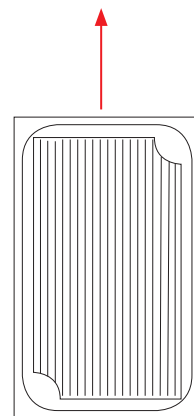

EQUIPMENT


- Climate Control-adjustable humidity
- Fan Control-adjustable speed
- Steam Control-adjustable chimney
- Delta T
- Optional: Core Prober
- 6 Cooking phases
- Regeneration / Maintenance
- Recipe book
- Favorites
- Cool Down / Preheat
- Cycle end alarm
- Door safety switch
- Safety thermostat
- LED chamber light
- Water connection $\frac{3}{4}$
- Folding inner glass for cleaning
- Reversing gear

FEATURES

Power		13.650 W
Max temperature		270° C
Weight		112 Kg.
Voltage		400 V - 50/60 Hz
Connection		Three phase 3F + N + T
Cooking chamber dimension		(W)490 x (D)655 x (H)935 mm.
External dimension		(W)815 x (D)880 x (H)1235 mm.
Distance between trays		80 mm.
RRP		
Change opening door		
Automatic washing system		
Core Prober		

RXB 610 GAS

REF. 710185

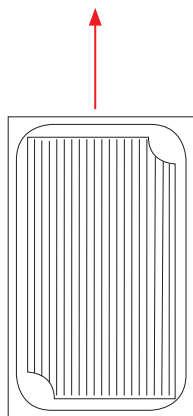

10 x 600 x 400

10 x GN 1/1

EQUIPMENT


- Cycle end alarm
- Door safety switch
- Safety thermostat
- Manual chimney control
- LED chamber light
- Water connection 3/4
- Folding inner glass for cleaning
- Reversing gear
- Timer 0-120 min. + continuous mode
- Adjustable humidity 0-100%

FEATURES

Power		600 W
Gas power		18 kW_15480 Kcal/h
Max temperature		250° C
Weight		127 Kg.
Voltage		230 V - 50/60 Hz
Connection		SINGLE PHASE
Cooking chamber dimension		(W)490 x (D)655 x (H)935 mm.
External dimension		(W)815 x (D)880 x (H)1395 mm.
Distance between trays		80 mm.
RRP		
Change opening door		
Natural gas		Under request
Chimney diameter		ø 150 mm.

RXB 610 V7 GAS

REF. 710315

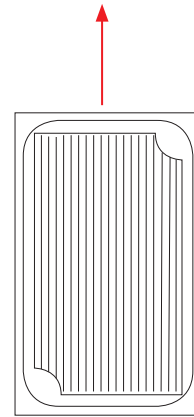

10 x 600 x 400

10 x GN 1/1

EQUIPMENT

- Climate Control-adjustable humidity
- Fan Control-adjustable speed
- Steam Control-adjustable chimney
- Delta T
- Opción Core Prober
- 6 Cooking phases
- Regeneration / Maintenance
- Recipe book
- Favorites
- Cool Down / Preheat
- Cycle end alarm
- Door safety switch
- Safety thermostat
- LED chamber light
- Water connection 3/4
- Folding inner glass for cleaning
- Reversing gear

FEATURES

Power		600 W
Gas power		18 kW_15480 Kcal/h
Max temperature		270° C
Weight		127 Kg.
Voltage		230 V - 50/60 Hz
Connection		SINGLE PHASE
Cooking chamber dimension		(W)490 x (D)655 x (H)935 mm.
External dimension		(W)815 x (D)880 x (H)1395 mm.
Distance between trays		80 mm.
RRP		
Change opening door		
Automatic washing system		
Core Prober		
Natural gas		Under request
Chimney diameter		ø 150 mm.



SERIES RX

CONVECTION OVENS



RX 203

REF. 710293



3 x 340 x 240

3 x GN 1/2

EQUIPMENT

- Safety thermostat
- Timer 0-60 min. Continuous mode

FEATURES

Capacity		3 x 340 x 240 - 3 x GN 1/2
Power		2.250 W
Max temperature		250° C
Weight		22 Kg.
Voltage		230 V - 50 Hz
Endowment		3 perforated aluminium tray
Connection		SINGLE PHASE
Cooking chamber dimension		(W)360 x (D)290 x (H)260 mm.
External dimension		(W)500 x (D)560 x (H)455 mm.
RRP		
Humidifier Ref. 710313		

RX 304

REF. 710040



4 x 430 x 340

EQUIPMENT

- Safety thermostat
- Timer 0-60 min. Continuous mode

FEATURES

Capacity		4 x 430 x 340
Power		3.100 W
Max temperature		250° C
Weight		34 Kg.
Voltage		230 V - 50 Hz
Endowment		4 perforated aluminium tray
Connection		SINGLE PHASE
Cooking chamber dimension		(W)450 x (D)340 x (H)345 mm.
External dimension		(W)590 x (D)675 x (H)540 mm.
Distance between trays		80 mm.
RRP RX-304		
GRILL 1,4 kW		
Humidifier		
Kit GN 2/3		
RRP RXL-304 Ref. 710088		

RX 384

REF. 710178



4 x 430 x 340

EQUIPMENT

- Cycle end alarm
- Door safety switch
- Safety thermostat
- Halogen chamber light
- Timer 0-60 min. Continuous mode

FEATURES

Capacity		4 x 430 x 340
Power		3.200 W
Max temperature		250° C
Weight		35 Kg.
Voltage		230 V - 50/60 Hz
Endowment		4 perforated aluminium tray
Connection		SINGLE PHASE
Cooking chamber dimension		(W)450 x (D)370 x (H)345 mm.
External dimension		(W)590 x (D)700 x (H)540 mm.
Distance between trays		80 mm.
RRP RX-384		
GRILL 1,4 kW		
Humidifier		
Kit GN 2/3		
RRP RXL-384 Ref. 710204		

RX 424

REF. 710018



4 x 480 x 340

EQUIPMENT

- Cycle end alarm
- Safety thermostat
- Halogen chamber light
- Timer 0-60 min. Continuous mode

FEATURES

Capacity		4 x 480 x 340
Power		3.100 W
Max temperature		250° C
Weight		36 Kg.
Voltage		230 V - 50 Hz
Endowment		4 wire rack
Connection		SINGLE PHASE
Cooking chamber dimension		(W)500 x (D)410 x (H)345 mm.
External dimension		(W)640 x (D)720 x (H)540 mm.
Distance between trays		80 mm.
RRP RX-424		
GRILL 1,4 kW		
Humidifier		
Kit GN 2/3		
RRP RXL-424 Ref. 710071		

RX 584 /
REF. 710267



4 x 480 x 440

EQUIPMENT

- Cycle end alarm
- Door safety switch
- Safety thermostat
- Halogen chamber light
- Reversing gear
- Timer 0-60 min. Continuous mode

FEATURES

Capacity		4 x 480 x 440
Power		3.700 W
Max temperature		250° C
Weight		39 Kg.
Voltage		230 V - 50/60 Hz
Endowment		4 wire rack
Connection		SINGLE PHASE
Cooking chamber dimension		(W)500 x (D)470 x (H)345 mm.
External dimension		(W)640 x (D)820 x (H)540 mm.
Distance between trays		80 mm.
RRP RX-584		
GRILL 1,4 kW		
Humidifier		
Kit GN 2/3		
RRP RXL-584 Ref. 710275		

RX 603

REF. 710051



3 x 600 x 400

EQUIPMENT

- Cycle end alarm
- Door safety switch
- Safety thermostat
- Halogen chamber light
- Reversing gear
- Timer 0-60 min. Continuous mode

FEATURES

Capacity		3 x 600 x 400
Power		3.900 W
Max temperature		250° C
Weight		39Kg.
Voltage		230 V - 50/60 Hz
Endowment		3 wire rack
Connection		SINGLE PHASE
Cooking chamber dimension		(W)620 x (D)450 x (H)270 mm.
External dimension		(W)760 x (D)800 x (H)465 mm.
Distance between trays		80 mm.
RRP RX-603		
GRILL 1,4 kW		
Humidifier		
Kit GN 1/1		
RRP RXL-603 Ref. 710072		

RX 604

REF. 710055



4 x 600 x 400

EQUIPMENT

- Cycle end alarm
- Door safety switch
- Safety thermostat
- Halogen chamber light
- Reversing gear
- Timer 0-60 min. Continuous mode

FEATURES

Capacity		4 x 600 x 400
Power		5.700 W
Max temperature		250° C
Weight		42 Kg.
Voltage		400 / 230 V - 50/60 Hz
Endowment		4 wire rack
Connection		Three phase 3F + N + T
Cooking chamber dimension		(W)620 x (D)450 x (H)350 mm.
External dimension		(W)760 x (D)800 x (H)545 mm.
Distance between trays		80 mm.
RRP RX-604		
GRILL 1,4 kW		
Humidifier		
Kit GN 1/1		
Change to single phase		

RX 604 PLUS

REF. 710056



4 x 600 x 400

EQUIPMENT

- Cycle end alarm
- Door safety switch
- Safety thermostat
- Halogen chamber light
- Reversing gear
- Timer 0-60 min. Continuous mode

FEATURES

Capacity		4 x 600 x 400
Power		6.300 W
Max temperature		250° C
Weight		48 Kg.
Voltage		400 / 230 V - 50/60 Hz
Endowment		4 wire rack
Connection		Three phase 3F + N + T
Cooking chamber dimension		(W)620 x (D)450 x (H)350 mm.
External dimension		(W)760 x (D)800 x (H)545 mm.
Distance between trays		80 mm.
RRP RX-604-PLUS		
GRILL 1,4 kW		
Humidifier		
Kit GN 1/1		
Change to single phase		
RRP RXL-604-PLUS Ref. 710073		

SERIES M/ME



ME 384

REF. 710175



4 x 430 x 340

EQUIPMENT

- Adjustable humidity 0-100%
- Cooking phases
- Recipe book
- Cycle end alarm
- Door safety switch
- Safety thermostat
- Halogen chamber light
- Water connection $\frac{3}{4}$
- Reversing gear
- Pre heating

FEATURES

Capacity		4 x 430 x 340
Power		3.200 W
Max temperature		260° C
Weight		35 Kg.
Voltage		230 V - 50/60 Hz
Endowment		4 wire rack
Connection		SINGLE PHASE
Cooking chamber dimension		(W)450 x (D)370 x (H)345 mm.
External dimension		(W)590 x (D)700 x (H)540 mm.
Distance between trays		80 mm.
RRP ME-384		
Kit GN 2/3		
RRP ME-384-L Ref. 710213		

M 603 /
REF. 710126



3 x 600 x 400

EQUIPMENT

- Cycle end alarm
- Door safety switch
- Safety thermostat
- Halogen chamber light
- Reversing gear
- Timer 0-60 min. Continuous mode

FEATURES

Capacity		3 x 600 x 400
Power		3.900 W
Max temperature		250° C
Weight		42 Kg.
Voltage		230 V - 50/60 Hz
Endowment		3 wire rack
Connection		SINGLE PHASE
Cooking chamber dimension		(W)680 x (D)450 x (H)280 mm.
External dimension		(W)820 x (D)800 x (H)475 mm.
Distance between trays		80 mm.
RRP M-603		
Humidifier		
RRP M-603-L ref. 710127		

ME 603

REF. 710128



3 x 600 x 400

EQUIPMENT

- Adjustable humidity 0-100%
- Recipe book
- Cycle end alarm
- Door safety switch
- Safety thermostat
- Halogen chamber light
- Water connection $\frac{3}{4}$
- Reversing gear
- Pre heating

FEATURES

Capacity		3 x 600 x 400
Power		3.900 W
Max temperature		260° C
Weight		42 Kg.
Voltage		230 V - 50/60 Hz
Endowment		3 wire rack
Connection		SINGLE PHASE
Cooking chamber dimension		(W)680 x (D)450 x (H)280 mm.
External dimension		(W)820 x (D)800 x (H)475 mm.
Distance between trays		80 mm.
RRP ME-603		
Kit GN 1/1		
RRP ME-603-L Ref. 710129		

M 604 PLUS

REF. 710130



4 x 600 x 400

EQUIPMENT

- Cycle end alarm
- Door safety switch
- Safety thermostat
- Halogen chamber light
- Reversing gear
- Timer 0-60 min. Continuous mode

FEATURES

Capacity		4 x 600 x 400
Power		6.300 W
Max temperature		250° C
Weight		51 Kg.
Voltage		400 / 230 V - 50/60 Hz
Endowment		4 wire rack
Connection		Three phase 3F + N
Cooking chamber dimension		(W)680 x (D)450 x (H)360 mm.
External dimension		(W)820 x (D)800 x (H)555 mm.
Distance between trays		80 mm.
RRP M-604-PLUS		
Humidifier		
RRP M-604-PLUS-L Ref. 710131		
Change to single phase		

ME 604 PLUS

REF. 710108



4 x 600 x 400

EQUIPMENT

- Adjustable humidity 0-100%
- Recipe book
- Cycle end alarm
- Door safety switch
- Safety thermostat
- Halogen chamber light
- Water connection $\frac{3}{4}$
- Reversing gear
- Pre heating

FEATURES

Capacity		4 x 600 x 400
Power		6.300 W
Max temperature		260° C
Weight		51 Kg.
Voltage		400 / 230 V - 50/60 Hz
Endowment		4 wire rack
Connection		Three phase 3F + N
Cooking chamber dimension		(W)680 x (D)450 x (H)360 mm.
External dimension		(W)820 x (D)800 x (H)555 mm.
Distance between trays		80 mm.
RRP ME-604-PLUS		
Kit GN 1/1		
RRP ME-604-PLUS-L Ref. 710131		
Change to single phase		

MP 603

REF. 710002



3 x 600 x 400

EQUIPMENT

- Cycle end alarm
- Door safety switch
- Safety thermostat
- Halogen chamber light
- Timer 0-60 min. Continuous mode

FEATURES

Capacity		3 x 600 x 400
Power		3.300 W
Max temperature		250° C
Weight		35 Kg.
Voltage		230 V - 50/60 Hz
Endowment		3 wire rack
Connection		SINGLE PHASE
Cooking chamber dimension		(W)620 x (D)450 x (H)270 mm.
External dimension		(W)760x (D)760 x (H)465 mm.
Distance between trays		80 mm.
RRP		
GRILL 2,2 kW		
Humidifier		
Kit GN 1/1		

MP 604

REF. 710001



4 x 600 x 400

EQUIPMENT

- Cycle end alarm
- Door safety switch
- Safety thermostat
- Halogen chamber light
- Timer 0-60 min. Continuous mode

FEATURES

Capacity		4 x 600 x 400
Power		3.800 W
Max temperature		250° C
Weight		44 Kg.
Voltage		230 V - 50/60 Hz
Endowment		4 wire rack
Connection		SINGLE PHASE
Cooking chamber dimension		(W)620 x (D)450 x (H)350 mm.
External dimension		(W)760x (D)760 x (H)540 mm.
Distance between trays		80 mm.
RRP		
GRILL 2,2 kW		
Humidifier		
Kit GN 1/1		

PROVER



F 408

REF. 730002



8 x 480 x 340

F 608

REF. 730001



8 x 600 x 400

EQUIPMENT

■ Dry and wet heat control

FEATURES

Power		700 W
Max temperature		85° C
Weight		32 Kg.
Voltage		230 V - 50/60 Hz
Connection		SINGLE PHASE
External dimension		(W)640 x (D)640 x (H)930 mm.
Distance between trays		80 mm.
RRP		

FEATURES

Power		1400 W
Max temperature		85° C
Weight		42 Kg.
Voltage		230 V - 50/60 Hz
Connection		SINGLE PHASE
External dimension		(W)760 x (D)700 x (H)930 mm.
Distance between trays		80 mm.
RRP		

TOASTERS



TTH 4400

REF. 720009

NEW



EQUIPMENT

- Adjustable speed regulator
- Removable bottom tray
- Height adjustment for cavity entry (Min. 30 / Max 70.)
- Double direction of rotation
- Upper tray warmer
- Food input and output tray
- Independent power element regulator

FEATURES

Power		4.400 W
Weight		35 Kg.
Voltage		230 V - 50/60 Hz
Connection		Single phase
External dimension		(W)1258 x (D)575 x (H)335 mm.
Cooking chamber dimension		(W)335 x (D)555 x (H)70 mm.
RRP		
Change to three phase		

TTV 2400

REF. 720003

TTV 4000

REF. 720002



EQUIPMENT

■ Adjustable speed regulator ■ Independent power element regulator ■ Removable bottom tray

FEATURES

Power	2.800 W
Weight 	20 Kg.
Voltage 	230 V - 50/60 Hz
Connection	SINGLE PHASE
External dimension	(W)480 x (D)510 x (H)410 mm.
Cooking chamber dimension	(W)260 x (D)460 x (H)70 mm.
RRP	

FEATURES

Power	4.000 W
Weight 	22 Kg.
Voltage 	400 / 230 V - 50/60 Hz
Connection	Single phase
External dimension	(W)570 x (D)620 x (H)400 mm.
Cooking chamber dimension	(W)360 x (D)570 x (H)70 mm.
RRP	
Change to three phase	

TTH 3002

REF. 720001



EQUIPMENT

- Adjustable speed regulator
- Independent power element regulator
- Removable bottom tray

FEATURES

Power		3.000 W
Weight		20 Kg.
Voltage		230 V - 50/60 Hz
Connection		SINGLE PHASE
External dimension		(W)750 x (D)420 x (H)250 mm.
Cooking chamber dimension		(W)200 x (D)500 x (H)70 mm.
RRP		



PIZZA OVENS

HP 133

REF. 710100



1 x 350 mm.

HP 233

REF. 710101



2 x 350 mm.

EQUIPMENT

- Cooking surface high-quality refractory material
- Cycle end alarm
- Timer 0-60 min. + continuous mode

FEATURES

Power		2.000 W
Max temperature		320° C
Weight		19 Kg.
Voltage		230 V - 50/60 Hz
Connection		SINGLE PHASE
Cooking chamber dimension		(W)405 x (D)360 x (H)80 mm.
External dimension		(W)535 x (D)535 x (H)261 mm.
RRP		

FEATURES

Power		3.000 W
Max temperature		320° C
Weight		28 Kg.
Voltage		230 V - 50/60 Hz
Connection		SINGLE PHASE
Cooking chamber dimension		2 x (W)405 x (D)360 x (H)80 mm.
External dimension		(W)535 x (D)535 x (H)390 mm.
RRP		

HP 433

REF. 710120



4 x 330 mm.

HP 833

REF. 710112



8 x 330 mm.

EQUIPMENT

- Cooking surface high-quality refractory material
- LED chamber light
- Independent base/ top temperatura control
- Thermometer

FEATURES

Power	5.600 W
Max temperature 	400° C
Weight 	90 Kg.
Voltage 	400 / 230 V - 50/60 Hz
Connection	Three phase 3F + N + T
Cooking chamber dimension	(W)700 x (D)700 x (H)169 mm.
External dimension	(W)1000 x (D)945 x (H)385 mm.
RRP	
Change to single phase	

FEATURES

Power	11.200 W
Max temperature 	400° C
Weight 	140 Kg.
Voltage 	400 V - 50/60 Hz
Connection	Three phase 3F + N + T
Cooking chamber dimension	2 x (W)700 x (D)700 x (H)169 mm.
External dimension	(W)1000 x (D)945 x (H)660 mm.
RRP	

HP 633

REF. 710134



6 x 330 mm.

HP 1233

REF. 710109



12 x 330 mm.

EQUIPMENT

- Cooking surface high-quality refractory material
- LED chamber light
- Independent base/ top temperatura control
- Termometer

FEATURES

Power	8.800 W
Max temperature 	400° C
Weight 	125 Kg.
Voltage 	400 V - 50/60 Hz
Connection	Three phase 3F + N + T
Cooking chamber dimension	(W)1054 x (D)700 x (H)169 mm.
External dimension	(W)1355 x (D)945 x (H)385 mm.
RRP	

FEATURES

Power	17.600 W
Max temperature 	400° C
Weight 	250 Kg.
Voltage 	400 V - 50/60 Hz
Connection	Three phase 3F + N + T
Cooking chamber dimension	2 x (W)1054 x (D)700 x (H)169 mm.
External dimension	(W)1355 x (D)945 x (H)660 mm.
RRP	



REGENERATOR

RG 311

REF. 740002



3 x GN 1/1

RG 311 A

REF. 740005



3 x GN 1/1

EQUIPMENT

- Cycle end alarm
- Door safety switch
- Safety thermostat
- Reversing gear
- Change opening door

FEATURES

Power	3.900 W
Max temperature 	170° C
Weight 	39 Kg.
Voltage 	230 V - 50/60 Hz
Connection	SINGLE PHASE
Cooking chamber dimension	(W)594 x (D)386 x (H)255 mm.
External dimension	(W)735 x (D)710 x (H)450 mm.
Distance between trays	65 mm.
Humidity	0 % - 100 %
99 cooking programs	With 3 phase each
Water connection	✓
Pre heating	✓
RRP	

FEATURES

Power	3.900 W
Max temperature 	140° C / 160° C
Weight 	39 Kg.
Voltage 	230 V - 50/60 Hz
Connection	SINGLE PHASE
Cooking chamber dimension	(W)594 x (D)386 x (H)255 mm.
External dimension	(W)735 x (D)710 x (H)450 mm.
Distance between trays	65 mm.
RRP	

RG 611

REF. 740001



6 x GN 1/1

RG 611 A

REF. 740004



6 x GN 1/1

EQUIPMENT

- Cycle end alarm
- Reversing gear
- Door safety switch
- Change opening door
- Safety thermostat

FEATURES

Power	5.650 W
Max temperature 	170° C
Weight 	52 Kg.
Voltage 	400 / 230 V - 50/60 Hz
Connection	Single phase / Three phase
Cooking chamber dimension	(W)594 x (D)386 x (H)451 mm.
External dimension	(W)735 x (D)710 x (H)720 mm.
Distance between trays	65 mm.
Humidity	0 % - 100 %
99 cooking programs	With 3 phase each
Water connection	✓
Pre heating	✓
RRP	

FEATURES

Power	5.650 W
Max temperature 	140° C / 160° C
Weight 	52 Kg.
Voltage 	400 / 230 V - 50/60 Hz
Connection	Single phase / Three phase
Cooking chamber dimension	(W)594 x (D)386 x (H)451 mm.
External dimension	(W)735 x (D)710 x (H)720 mm.
Distance between trays	65 mm.
RRP	

RG 1011

REF. 740003



10 x GN 1/1

RG 1011 A

REF. 740006



10 x GN 1/1

EQUIPMENT

- Cycle end alarm
- Door safety switch
- Safety thermostat
- Reversing gear
- Change opening door

FEATURES

Power		10.300 W
Max temperature		170° C
Weight		85 Kg.
Voltage		400 / 230 V - 50/60 Hz
Connection		Single phase / Three phase
Cooking chamber dimension		(W)594 x (D)386 x (H)710 mm.
External dimension		(W)735 x (D)710 x (H)985 mm.
Distance between trays		65 mm.
Humidity		0 % - 100 %
99 cooking programs		With 3 phase each
Water connection		✓
Pre heating		✓
RRP		

FEATURES

Power		10.300 W
Max temperature		140° C / 160° C
Weight		85 Kg.
Voltage		400 / 230 V - 50/60 Hz
Connection		Single phase / Three phase
Cooking chamber dimension		(W)594 x (D)386 x (H)710 mm.
External dimension		(W)735 x (D)710 x (H)985 mm.
Distance between trays		65 mm.
RRP		

GRILL



GR 1

REF. 750001



FEATURES

Power	2.000 W
Max temperature	250° C
Weight	21 Kg.
Voltage	230 V - 50/60 Hz
Connection	SINGLE PHASE
External dimension	(W)330 x (D)430 x (H)260 mm.
Cast iron cooking surface	255 x 245 mm.
RRP GR-1	
RRP GRL-1 ref. 750003	

GR 2

REF. 750002



FEATURES

Power	4.000 W
Max temperature	250° C
Weight	40 Kg.
Voltage	230 V - 50/60 Hz
Connection	SINGLE PHASE
External dimension	(W)650 x (D)430 x (H)260 mm.
Cast iron cooking surface	550 x 245 mm.
RRP GR-2	
RRP GRL-2 ref. 750004	

GR 3

REF. 750007



FEATURES

Power	3.300 W
Max temperature	250° C
Weight	30 Kg.
Voltage	230 V - 50/60 Hz
Connection	SINGLE PHASE
External dimension	(W)440 x (D)430 x (H)260 mm.
Cast iron cooking surface	360 x 245 mm.
RRP GR-3	
RRP GRL-3 ref. 750008	

EQUIPMENT

- Cast iron cooking surface
- Front grease collector
- Grooved base and top surface
- Adjustable height up the needs
- Hinged cover brake
- Smooth base cooking surface (GRL-1 / GRL-2 / GRL-3)

ST-C 200

Ref. 710367

**ST-C 400**

Ref. 710368

**ST-C 650**

Ref. 710369



COMPATIBLE MODELS	ST-C 1011 / ST-C 611 / ST-C 411	ST-C 1011 / ST-C 611 / ST-C 411	ST-C 611 / ST-C 411
DIMENSIONS	(W)460x(D)670 x(H)200 mm.	(W)460x(D)670 x(H)400 mm.	(W)460x(D)670 x(H)650 mm.
N° of GUIDES	-	-	7
RRP			

ST-C 850

Ref. 710370

**ST-C 650 B**

Ref. 710371

**ST-C 850 B**

Ref. 710372



COMPATIBLE MODELS	ST-C 1011	ST-C 423	ST-C 423
DIMENSIONS	(W)460x(D)670 x(H)850 mm.	(W)460x(D)495 x(H)650 mm.	(W)460x(D)495 x(H)850 mm.
N° of GUIDES	10	7	10
RRP			

STC 200 W

Ref. 710424

**STC 400 W**

Ref. 710421

**STC 650 W**

Ref. 710422



COMPATIBLE MODELS	ST-C 611 W / ST-C 411 W	ST-C 611 W / ST-C 411 W	ST-C 611 W / ST-C 411 W
DIMENSIONS	(W)500 x (D)490 x (H)200 mm.	(W)500 x (D)490 x (H)400 mm.	(W)500 x (D)490 x (H)650 mm.
N° of GUIDES	-	4	8
RRP			

STAND WHEEL CARRIER

Ref. 710286

RRP



	ST 300 <i>Ref. 710299</i>	ST 650 <i>Ref. 710300</i>	ST 850 <i>Ref. 710305</i>
COMPATIBLE MODELS	ST 604 / ST 604 V7 / ST 606 / ST 606 V7 / ST 610 / ST 610 V7		
DIMENSIONS	(W)770 x (D)720 x (H)300 mm.	(W)770 x (D)720 x (H)650 mm.	(W)770 x (D)720 x (H)850 mm.
N° of GUIDES	-	6	8
RRP			

	ST 300 GN 2/1 <i>Ref. 710431</i>	ST 650 GN 2/1 <i>Ref. 710432</i>	ST 850 GN 2/1 <i>Ref. 710433</i>
COMPATIBLE MODELS	ST 721 / ST 721V7 / ST 1221 / ST 1221 V7		
DIMENSIONS	(W)770 x (D)980 x (H)300 mm.	(W)770 x (D)980 x (H)650 mm.	(W)770 x (D)980 x (H)850 mm.
N° of GUIDES	-	6	8
RRP			

	RXB 300 <i>Ref. 710308</i>	RXB 650 <i>Ref. 710306</i>	RXB 850 <i>Ref. 710302</i>
COMPATIBLE MODELS	RXB 606 / RXB 610 / RXB 606V7 / RXB 610V7		
DIMENSIONS	(W) 715 x (D) 615 x (H) 300 mm.	(W) 715 x (D) 615 x (H) 650 mm.	(W) 715 x (D) 615 x (H) 850 mm.
N° of GUIDES	-	6	8
RRP			



	F 450 <i>Ref. 710307</i>	F 850 <i>Ref. 710301</i>
COMPATIBLE MODELS	F 106 / F 110 / F106V7 / F110V7	F 106 / F 110 / F106V7 / F110V7
DIMENSIONS	(W) 625 x (D) 550 x (H) 450 mm.	(W) 625 x (D) 550 x (H) 850 mm
N° of GUIDES	4	10
RRP		

SERIES ST 5 GN 1/1
Ref. 180H11
RRP

SERIES ST 7 GN 1/1
Ref. 180H12
RRP

SERIES ST 12 GN 1/1
Ref. 180H13
RRP



	RX 43/34 <i>Ref. 710077</i>	RX 48/34 <i>Ref. 710076</i>	RX 60/40 <i>Ref. 710075</i>
COMPATIBLE MODELS	Rx 304 / 384_ME 384	Rx 424 / 484 / 584_ME 424	Rx 603/604/604 PLUS/RG311/611/1011
DIMENSIONS	(W) 590 x (D) 580 x (H) 850 mm.	(W) 625 x (D) 640 x (H) 850 mm.	(W) 750 x (D) 700 x (H) 850 mm.
N° of GUIDES	8	8	8
RRP			



	M 60/40 <i>Ref. 710123</i>	HP 433 <i>Ref. 710135</i>	HP 633 <i>Ref. 710136</i>
COMPATIBLE MODELS	M 603 / 604 PLUS / ME 60 3/ 604 PLUS	HP 433 / HP 833	HP 633 / HP 1233
DIMENSIONS	(W) 810 x (D) 700 x (H) 850 mm.	(W) 1000 x (D) 900 x (H) 1100 mm.	(W) 1355 x (D) 900 x (H) 1100 mm.
N° of GUIDES	8	-	-
RRP			

STAND WHEEL CARRIER *Ref. 710286* **RRP**

EQUIPMENT

- MADE STAINLESS STEEL
- 4 ROTATING WHEELS 2 OF THEM WITH BREAKS
- SLIDING INHIBITORS
- DISTANCE BETWEEN GUIDES 80 mm.
- DETACHABLE FOR TRANSPORTATION

TROLLEY



TROLLEY SERIES ST



PLATE TROLLEY ST




	REF.	COMPATIBLE MODELS	DIMENSIONS	RRP
TROLLEY 10B 60/40	710097	RX 603/604/604 PLUS, MP 603/604, ME 603/604 PLUS, RXB 606/610	(W) 515 x (D) 620 x (H) 1.015 mm.	
TROLLEY 10B 48/34	710099	RX 424/484, ME 424	(W) 455 x (D) 500 x (H) 1.015 mm.	
TROLLEY 20B 60/40	710095	RX 603/604/604 PLUS, MP 603/604, ME 603/604 PLUS, RXB 606/610	(W) 515 x (D) 620 x (H) 1.860 mm.	
TROLLEY 20B 48/34	710098	RX 424/484, ME 424	(W) 455 x (D) 500 x (H) 1.860 mm.	
TROLLEY 20 GN 1/1	710403	All models GN1/1	(W) 440 x (D) 540 x (H) 1.700 mm.	
TROLLEY 20 GN 2/1	710408	All models GN2/1	(W) 640 x (D) 660 x (H) 1.700 mm.	
TROLLEY ST16 60/40	710346	ST 616/T/GAS	(W) 760 x (D) 595 x (H) 1.730 mm.	
TROLLEY ST20 GN 1/1	710347	ST 211/T/GAS	(W) 760 x (D) 595 x (H) 1.765 mm.	
TROLLEY ST20 GN 2/1	710348	ST 221/T/GAS	(W) 760 x (D) 765 x (H) 1.765 mm.	
TROLLEY PLATE GN 1/1	710429	ST 211/T/GAS (64 Plates)	(W) 760 x (D) 595 x (H) 1.765 mm.	
TROLLEY PLATE GN 2/1	710430	ST 221/T/GAS (100 Plates)	(W) 760 x (D) 765 x (H) 1.765 mm.	

PLATE TROLLEY COVER


Ref. 710311 RRP

SERIES ST COMPACT

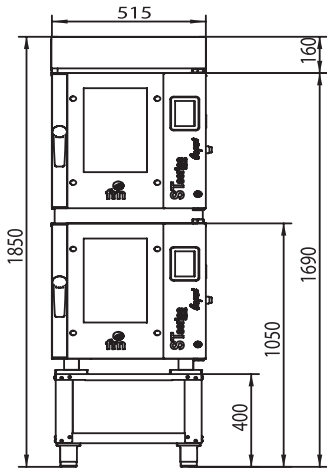


HOOD ST COMPACT
ST-C611 V5
ST-C611 V5
KIT SUPERPOSITION ST-C400

SERIES ST COMPACT

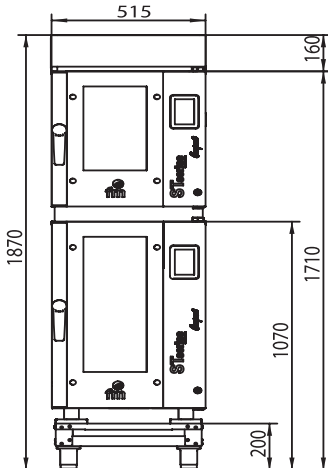


HOOD ST COMPACT
ST-C611 V5
ST-C1011 V5
KIT SUPERPOSITION ST-C200

SERIES ST COMPACT

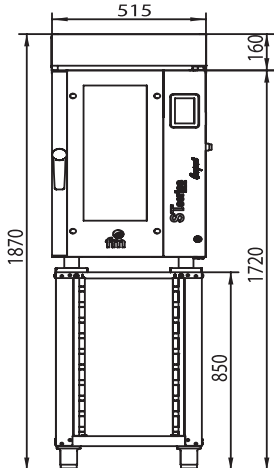


HOOD ST COMPACT
ST-C1011 V5
STAND ST-C850

SERIES ST COMPACT

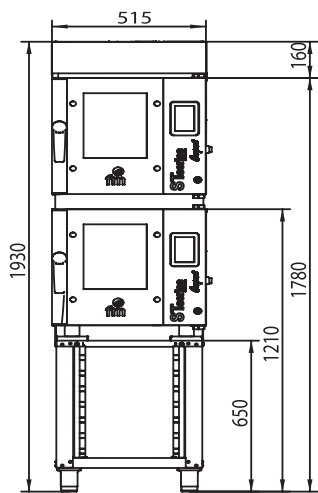


HOOD ST COMPACT
ST-C411 V5
ST-C411 V5
KIT SUPERPOSITION ST-C650

SERIES ST COMPACT

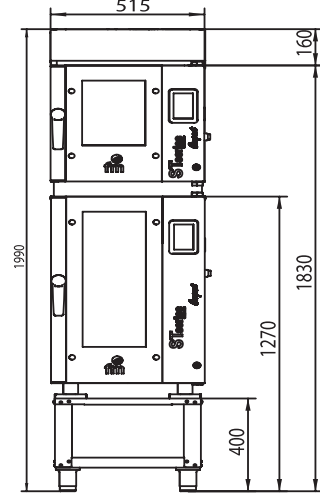


HOOD ST COMPACT
ST-C411 V5
ST-C1011 V5
KIT SUPERPOSITION ST-C400

SERIES ST COMPACT

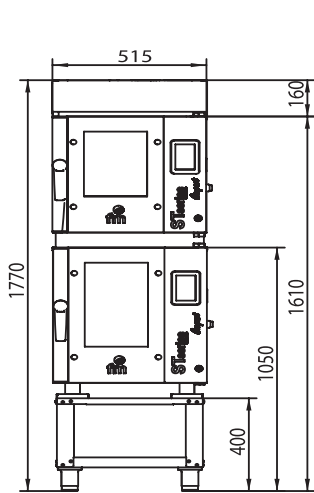


HOOD ST COMPACT
ST-C411 V5
ST-C611 V5
KIT SUPERPOSITION ST-C400

SERIES ST

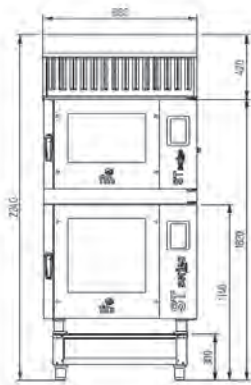


HOOD ST
ST 604
ST 606
STAND ST 300
KIT SUPERPOSITION SERIES ST

SERIES ST

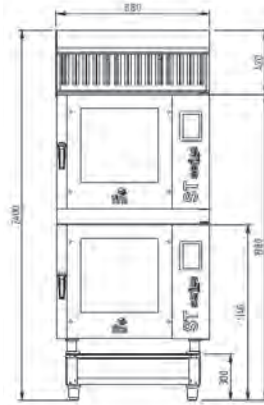


HOOD ST
ST 604
ST 606
STAND ST 300
KIT SUPERPOSITION SERIES ST

SERIES ST

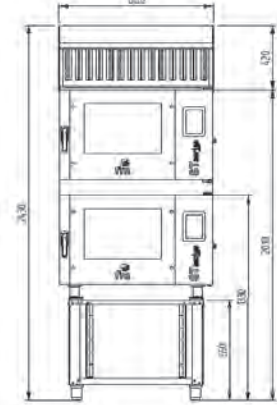

HOOD ST
ST 604
ST 606
STAND ST 300
KIT SUPERPOSITION SERIES ST

SERIES F

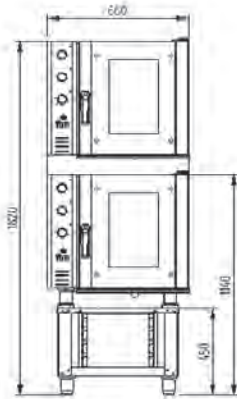


F106
F106
STAND F 450
KIT SUPERPOSITION SERIES F

SERIES RXB




RXB 606
RXB 606
STAND RXB300 300
KIT SUPERPOSITION SERIES RXB

SERIES RXB

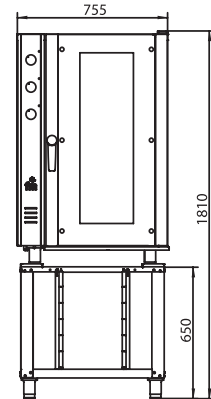


RXB 616
STAND RXB 650

SERIES RX

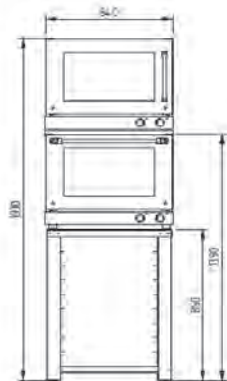


RXL 424
RX 424
STAND RX 48_34
KIT SUPERPOSITION RX 48_34

SERIES RX

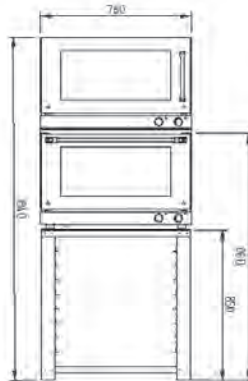

RXL 604 PLUS
RX 604 PLUS
STAND RX 60_40
KIT SUPERPOSITION SERIES RX 60_40


SERIES M

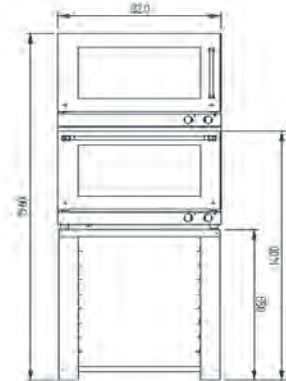

M 604 PLUS L
M 604 PLUS
STAND M 60_40
KIT SUPERPOSITION SERIES M 60_40


BAKERY / PASTRY

ALUMINIUM FLAT TRAY

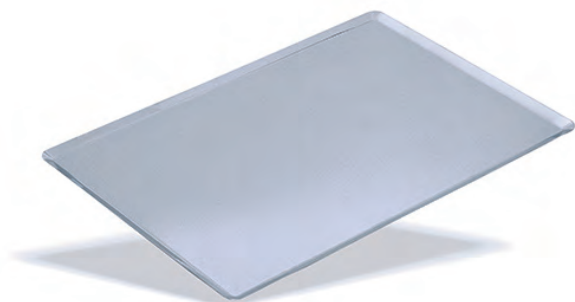


REF.	DIMENSIONS	RRP
810H10	430x340	
810H06	480x340	
810H04	600x400	

PERFORATED ALUMINIUM TRAY

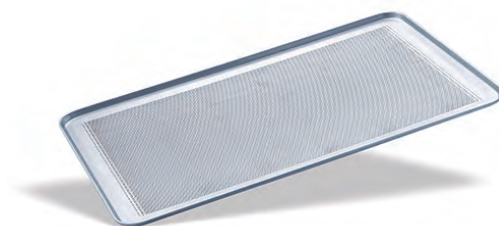

REF.	DIMENSIONS	RRP
810H09	320x240	
810H01	430x340	
810H02	480x340	
810H08	480x440	
810H03	600x400	

INOX. FLAT TRAY

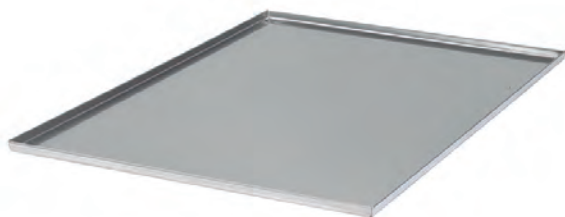


REF.	DIMENSIONS	RRP
860H12	340x240	
860H07	430x340	
860H08	480x340	
860H10	480x440	
860H09	600x400	

FRENCH BAGUETTE TRAY



REF.	DIMENSIONS	RRP
810H05	600x400	

WIRE RACK

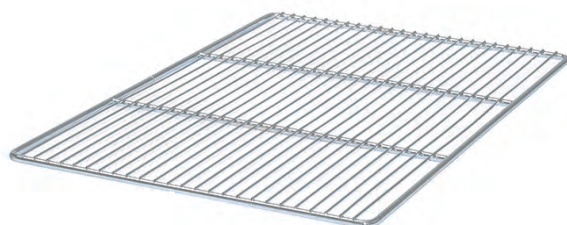

REF.	DIMENSIONS	RRP
820H03	430x340	
820H01	480x340	
820H04	480x440	
820H02	600x400	

INOX. WIRE RACK



REF.	DIMENSIONS	RRP
840H25	GN 2/1	
840H26	GN 1/1	
840H41	600x400	

GASTRONOMY

STAINLESS STEEL CONTAINER GN 2/1



REF.	DEPTH	RRP
840H04	H20	
840H05	H40	
840H06	H65	

STAINLESS STEEL CONTAINER GN 1/1



REF.	DEPTH	RRP
840H07	H20	
840H08	H40	
840H09	H55	

STAINLESS STEEL CONTAINER GN 2/3



REF.	DEPTH	RRP
840H10	H20	
840H11	H40	
840H12	H65	

PERFORATED STAINLESS STEEL CONTAINER GN 2/1



REF.	DEPTH	RRP
840H13	H20	
840H14	H40	
840H15	H65	

PERFORATED STAINLESS STEEL CONTAINER GN 1/1



REF.	DEPTH	RRP
840H16	H20	
840H17	H40	
840H18	H55	


PERFORATED STAINLESS STEEL CONTAINER GN 2/3



REF.	DEPTH	RRP
840H19	H20	
840H20	H40	
840H21	H65	

BAKERY / PASTRY

NONSTICK ALUMINIUM FLAT TRAY

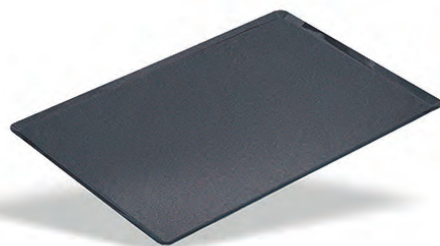

REF.	DIMENSIONS	RRP
810H11	600x400	
840H14	GN 1/1	

NONSTICK ALUMINIUM PERFORATED TRAY




REF.	DIMENSIONS	RRP
810H12	600x400	
840H15	GN 1/1	

EGG TRAY GN



REF.	DIMENSIONS	RRP
840H28	GN 1/1	

NONSTICK ALUMINIUM TRAY GN 1/1 H 65 mm.

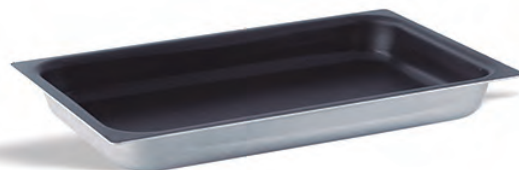

REF.	DIMENSIONS	RRP
840H29	GN 1/1	

NONSTICK GRILL FLAT TRAY GN 1/1



REF.	DIMENSIONS	RRP
840H03	GN 1/1	

DOUBLE NONSTICK TRAY GN 1/1



REF.	DIMENSIONS	RRP
840H38	GN 1/1	

GASTRONOMY

GRANITE CONTAINER GN 1/1 PROF. 40 MM



REF.	DIMENSIONS	RRP
840H36	GN 1/1	

NONSTICK GRILL GN 1/1




REF.	DIMENSIONS	RRP
840H37	GN 1/1	

BAKING AND ROASTING PAN




REF.	DIMENSIONS	RRP
840H32	20 cm.	

CHICKEN ROASTING TRAY

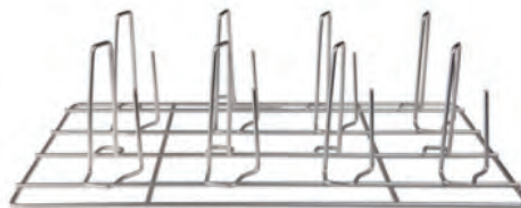

REF.	DIMENSIONS	RRP
840H39	GN 1/1	

RIBS TRAY

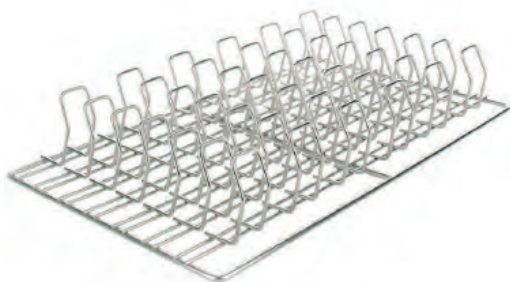

REF.	DIMENSIONS	RRP
840H40	GN 1/1	

FRYING TRAY



REF.	DIMENSIONS	RRP
840H34	GN 1/1	

PIZZA

ALUMINIUM PIZZA PAN



REF.	DIMENSIONS	RRP
811H01	250 mm.	
811H02	300 mm.	
811H03	350 mm.	

PIZZA PAN GRID



REF.	DIMENSIONS	RRP
811H04	250 mm.	
811H05	300 mm.	
811H06	350 mm.	

PERFORATED BOTTOM TRAY GN



REF.	DIMENSIONS	RRP
840H22	GN 2/1	
840H23	GN1/1	
840H24	GN 2/3	

STEAM CONDENSER



REF.	MODEL	RRP
710191	Steam condenser RX	
710124	Steam condenser RX_H2O	
710265	Steam condenser RX_DUO	
710164	Steam condenser RXB	
710338	Steam condenser SERIES ST	
710339	Steam condenser RXB y F V7	

KIT FOR SUPERPOSITION

REF.	MODEL	RRP
710349	KIT SUPERPOSITION RX 43/34	
710287	KIT SUPERPOSITION RX 48/34	
710264	KIT SUPERPOSITION RX 60/40	
710304	KIT SUPERPOSITION M 60/40	
710341	KIT SUPERPOSITION RXB	
710342	KIT SUPERPOSITION F	
710340	KIT SUPERPOSITION ST	
710377	KIT SUPERPOSITION ST Compact	

PRESSURE REGULATOR 3/4



REF.	RANGE	RRP
510H52	1 - 6 Bar	

HOOD COMPACT



HOOD ST



HOOD F / RXB



EQUIPMENT

- MADE OF STAINLESS STEEL
- OPTIONAL MOTOR HOOD Ø 80 mm
- OPTIONAL STEAM CONDENSER
- CONNECTION CHIMNEY Ø 200 mm

MODEL	REF.	COMPATIBLE MODELS	DIMENSIONS	RRP
ST COMPACT	710373	STC 411 / 411 ECO / 611 / 1011	(W) 515 x (D) 950 x (H) 160 mm.	
ST	710298	ALL COMPATIBLE MODELS SERIES ST (Except gas models)	(W) 880 x (D) 1.215 x (H) 425 mm.	
ST TROLLEY	710374	ALL COMPATIBLE MODELS SERIES ST (Except gas models)	(W) 880 x (D) 1.215 x (H) 425 mm.	
F	710138	F 106 / F 110	(W) 665 x (D) 900 x (H) 200 mm.	
F V7	710138	F 106 V7 / F 110 V7	(W) 725 x (D) 900 x (H) 200 mm.	
RXB	710137	RXB 606 / RXB 610	(W) 755 x (D) 965 x (H) 200 mm.	
RXB V7	710261	RXB 606 V7 / RXB 610 V7	(W) 815 x (D) 965 x (H) 200 mm.	
HP 433	710139	HP 433 / HP 833	(W) 1.000 x (D) 1.180 x (H) 200 mm.	
HP 633	710140	HP 633 / HP 1233	(W) 1.355 x (D) 1.180 x (H) 200 mm.	

MODEL	REF.	COMPATIBLE MODELS	RRP
KIT Steam condenser HOOD SERIES ST	710387	All models ST	
KIT Steam condenser HOOD SERIES F / RXB	710389	All models F y RXB	
KIT Steam condenser HOOD SERIES HP	710391	HP 433 / 633 / 833 / 1233	
KIT Steam motor ST	710388	All models ST	
KIT Steam motor F / RXB	710390	All models F y RXB	
KIT Steam motor HP	710392	HP 433 / 633 / 833 / 1233	

AUTOMATIC WASHING SYSTEM



REF.	RRP
710141	

HAND SHOWER



REF.	RRP
710310	

BAKER MITTS



REF.	RRP
870H01	

DETERGENT 5L.



REF.	RRP
870H02	

RINSE AID 5L.



REF.	RRP
870H03	

FILTER

WATER SOFTENER



REF.	RRP
710352	

HEAD CONNETION



REF.	RRP
710350	

REF. 710090	DIGIMETER	RRP
-------------	-----------	-----

VACUUM CORE PROBE



REF.	RRP
710376	

REMOVABLE CORE PROBE



REF.	RRP
710375	

CORE PROBE PLACEMENT



REF.	RRP
710343	

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Киргизия (996)312-96-26-47 Казахстан (772)734-952-31 Таджикистан (992)427-82-92-69

<http://fmind.nt-rt.ru> || fdm@nt-rt.ru